



Up-shine[®] Lighting



Technical Application Guide for UP-SHINE LED Downlight

UP-DL98A-3-6W

UP-DL98B-3-6W

Introduction



DL98 model is an integrated downlight provides the perfect combination of efficiency, light comfort and design, without compromising on lighting performance (color rendering and color uniformity). It offers a wide choice of options for creating the desired ambience.

Features

1. Integrated SMD LED down lights with Faceted / Specula Reflector.
2. No external driver required which facilitates easy installation.
3. A perfect alternative to traditional ceiling mounted luminaires.
4. Looping from luminaires to luminaires with mains through-wiring.
5. IP54 protection at room side, suitable for bathrooms, kitchens.
6. Triac Dimmable version available.
7. Good heat dissipating to ensure long life.
8. Internal Driver

Application notes

- IP54 for indoor use only
- The lamp must be installed by professional electrician
- Ensure the power supply is switched off before fitting this product
- Do not touch the lamp when in use
- Keep away from hot steam and corrosive gas

Application Areas


It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

Certificate

CE RoHS



Product Information

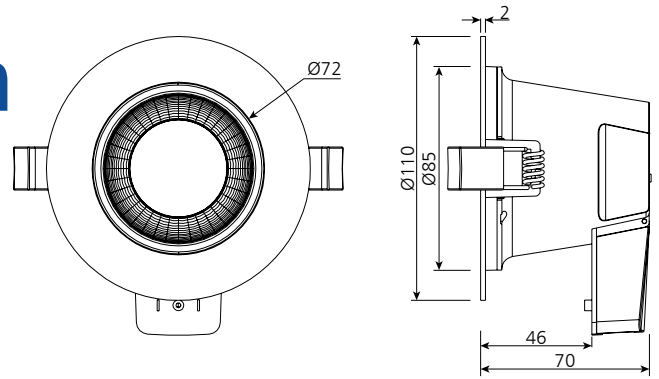

Technical Specifications

Model	Voltage	Power	Power Factor	Beam angle	Dimmable	Lumen (±5%)	CCT	UGR	Lifespan	CRI	Dimension
UP-DL98A-3-6W UP-DL98B-3-6W	AC100-277V	6W	≥0.9	90°	No	500	3000K	—	50,000h	≥80	Ø110*70mm cutout 90-95mm
						600	4000K				
						580	5000K				
						590	5700K				
UP-DL98A-3-6W-D UP-DL98B-3-6W-D	AC200-240V	6W	≥0.9	90°	Yes	490	3000K	—	50,000h	≥80	Ø110*70mm cutout 90-95mm
						590	4000K				
						560	5000K				
						580	5700K				
UP-DL98B-3-6W	AC100-277V	6W	≥0.9	60°	No	560	3000K	≤19	50,000h	≥80	Ø110*70mm cutout 90-95mm
						610	4000K				
						580	5000K				
						600	5700K				
UP-DL98B-3-6W-D	AC200-240V	6W	≥0.9	60°	Yes	550	3000K	≤19	50,000h	≥80	Ø110*70mm cutout 90-95mm
						590	4000K				
						560	5000K				
						580	5700K				





Driver data Sheet

Driver data	Dim	Non dim
Input rated Voltage	AC230V	AC100-277V
Frequency	50Hz	50/60Hz
Input Voltage	AC200-240V	AC90-305V
Efficiency	≥83%	≥85%
Total load Wattage	6W±0.5W	6W±0.5W
Power Factor	≥0.85	≥0.9
Rated input current	≤0.04A	≤0.07A
Full load output Voltage	DC65-75V	DC65-75V
Rated output current	75mA	75mA
Output current range	75mA±5%	75mA±5%
Power tolerance	±5%	±5%
Current output tolerance	±5%	±5%
Dimming range	8%-100%	—
Dimmer	Triac dimmers	—
Short circuit protection	PASS	PASS
Over voltage protection	PASS	PASS
Over temperature protection	PASS	PASS
THD	—	—
Withstand voltage	—	—





Fixture Compatibility

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
6W	II	IP54	-20°C~45°C	0~90%	-20°C~65°C


Spectral Distribution

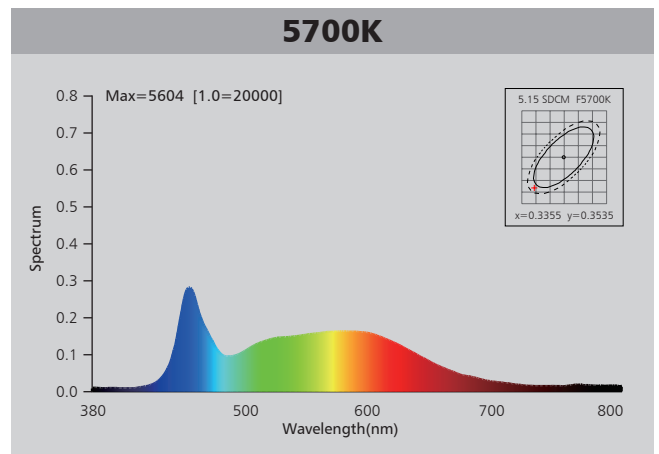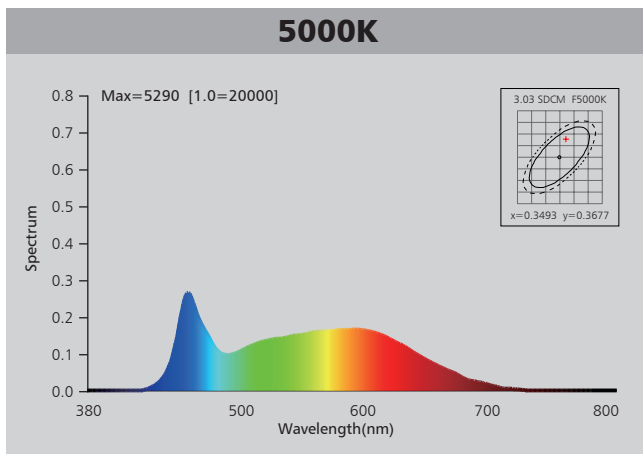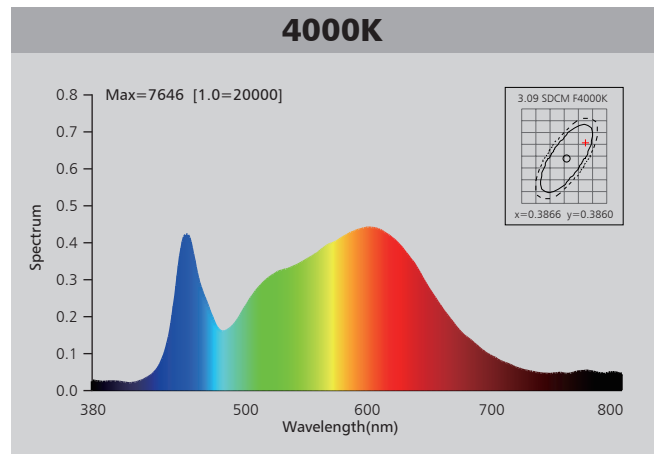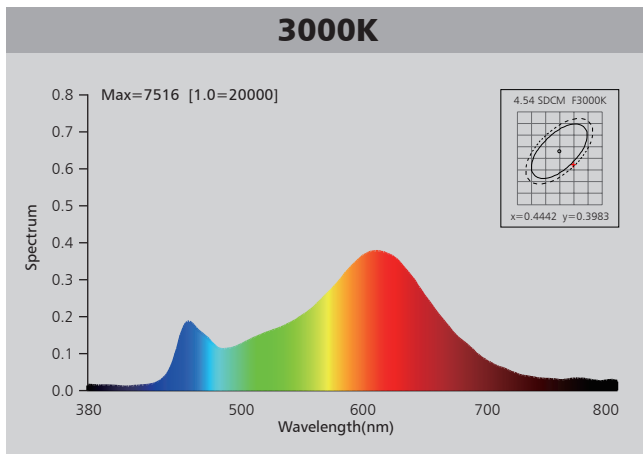

Photometric Diagram

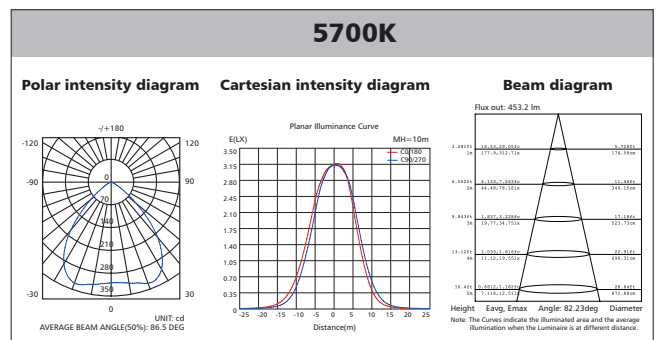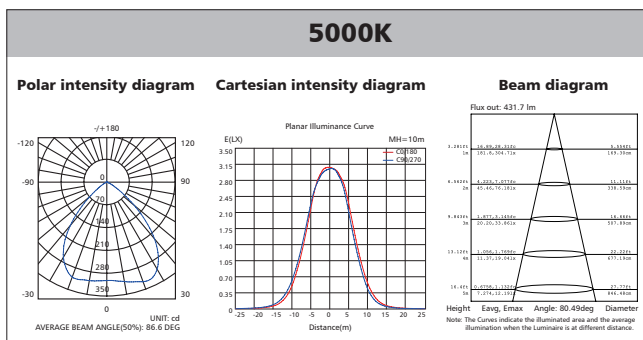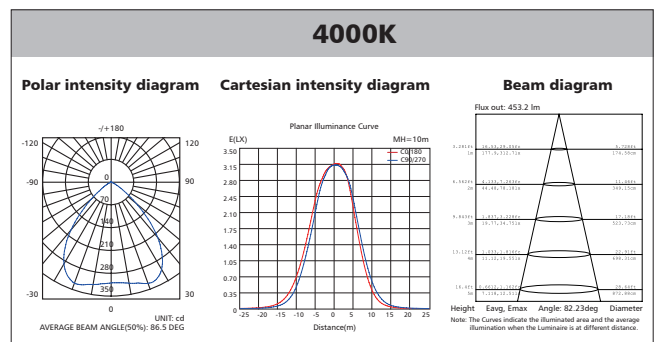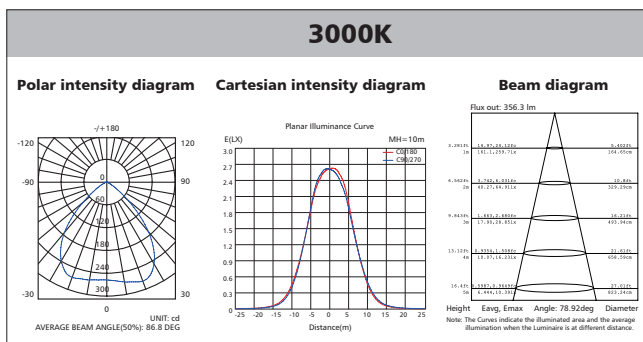

Polar Diagram Comparison

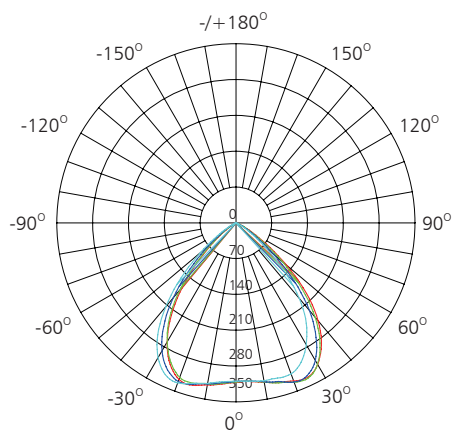



UNIT: cd

- C0/180, 86.9 deg
- C30/210, 86.5 deg
- C60/240, 86.5 deg
- C90/270, 86.1 deg

AVERAGE BEAM ANGLE (50%): 86.5DEG




Driver lifetime & LED light decay rate

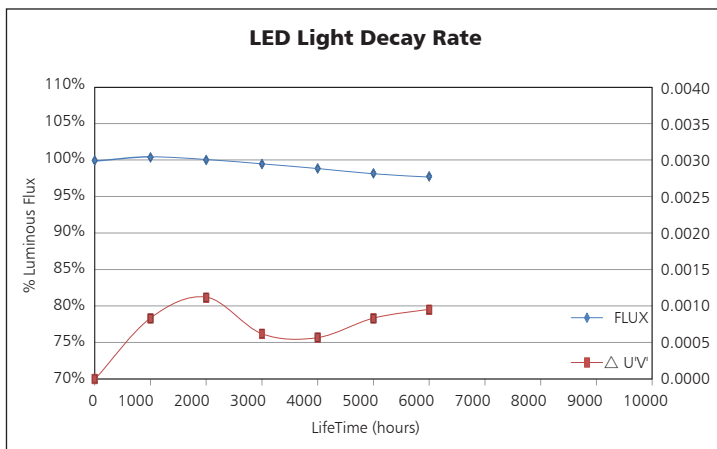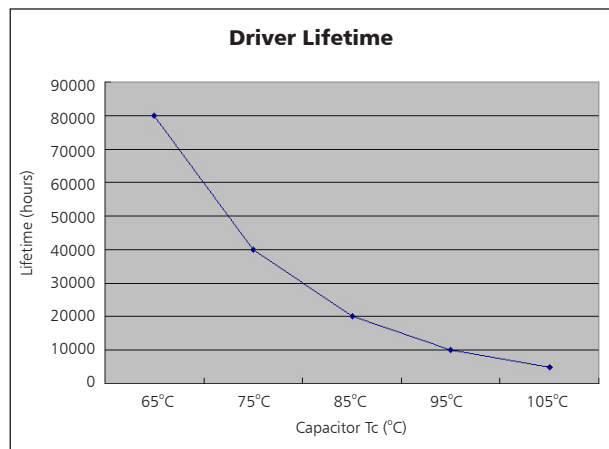

Temperature


- The testing is operated at 25°C
- The lifetime of capacitor, minimum of 5,000 hours if operated at 105°C, will be doubled whenever the temperature drops 10°C
- The highest withstand temperature of IC, MOS could be 120°C
- The highest withstand temperature of LED junction temperature is 150°C

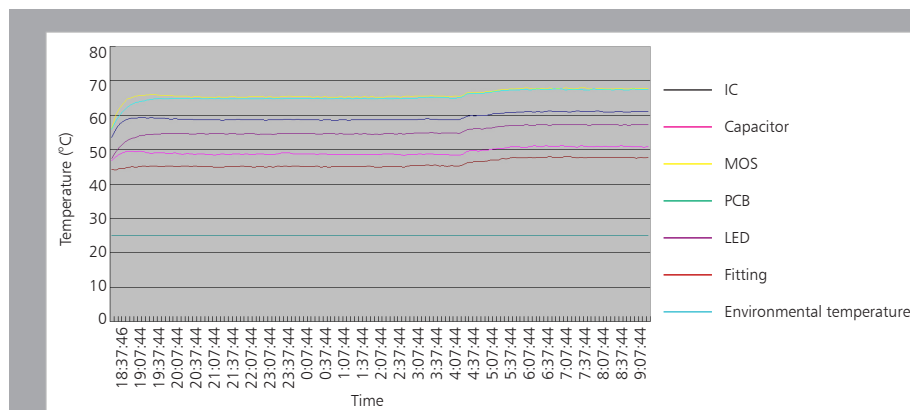

The driver lifespan is based on capacitor working temperature.

Installation

Install requirements	
A-gap above the fitting	25mm
B-gap to the building material	25mm
C-gap to the thermal insulation	25mm

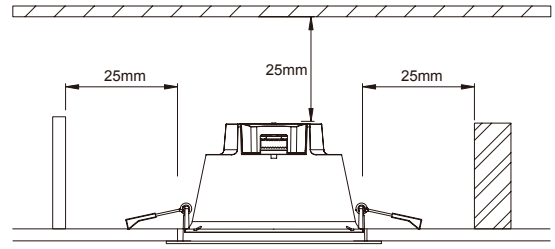

1. Open a hole according to the cutout size of led downlight.

Figure 1

2. Open the line pressing cover, see Figure 1.

3. Put the main AC wire through line pressing clip, feed the L.N to the fast connection terminal block respectively then compress the line pressing clip.

4. Close the line pressing cover tightly.

5. Hold back spring clips then push downlight into the hole.

6. Make sure the downlight fixed tightly in ceiling, turn on the power.

Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	46.1*31.4*48	0.18	6.8	24

	CTNS	Q'TY(PCS)	VOLUME(CBM)
20" standard container	396	9504	28
40" standard container	794	19056	56

