



Up-shine[®] Lighting



Technical Application Guide for UP-SHINE LED Downlight

UP-DL98A-6-18W

UP-DL98B-6-18W

Introduction



DL98 model is an integrated downlight provides the perfect combination of efficiency, light comfort and design, without compromising on lighting performance (color rendering and color uniformity). It offers a wide choice of options for creating the desired ambience.

Features

1. Integrated SMD LED down lights with Faceted / Specula Reflector.
2. No external driver required which facilitates easy installation.
3. A perfect alternative to traditional ceiling mounted luminaires.
4. Looping from luminaires to luminaires with mains through-wiring.
5. IP54 protection at room side, suitable for bathrooms, kitchens.
6. Triac Dimmable version available.
7. Good heat dissipating to ensure long life.
8. Internal Driver

Application notes

- IP54 for indoor use only
- The lamp must be installed by professional electrician
- Ensure the power supply is switched off before fitting this product
- Do not touch the lamp when in use
- Keep away from hot steam and corrosive gas

Application Areas


It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

Certificate

CE **RoHS**



Product Information

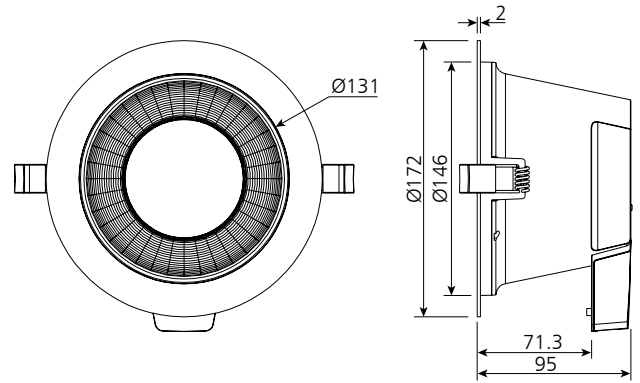

Technical Specifications

Model	Voltage	Power	Power Factor	Beam angle	Dimmable	Lumen (±5%)	CCT	UGR	Lifespan	CRI	Dimension
UP-DL98A-6-18W UP-DL98B-6-18W	AC100-277V	18W	≥0.9	90°	No	1580	3000K	—	50,000h	≥80	Ø172*95mm cutout 150-165mm
						1890	4000K				
						1840	5000K				
						1850	5700K				
UP-DL98A-6-18W-D UP-DL98B-6-18W-D	AC200-240V	18W	≥0.9	90°	Yes	1530	3000K	—	50,000h	≥80	Ø172*95mm cutout 150-165mm
						1800	4000K				
						1730	5000K				
						1760	5700K				
UP-DL98B-6-18W	AC100-277V	18W	≥0.9	60°	No	1690	3000K	≤19	50,000h	≥80	Ø172*95mm cutout 150-165mm
						1890	4000K				
						1840	5000K				
						1800	5700K				
UP-DL98B-6-18W-D	AC200-240V	18W	≥0.9	60°	Yes	1660	3000K	≤19	50,000h	≥80	Ø172*95mm cutout 150-165mm
						1870	4000K				
						1800	5000K				
						1760	5700K				





Driver data Sheet

Driver data	Dim	Non dim
Input rated Voltage	AC230V	AC100-277V
Frequency	50Hz	50/60Hz
Input Voltage	AC200-240V	AC90-305V
Efficiency	≥85%	≥86%
Total load Wattage	18W±1W	18W±1W
Power Factor	≥0.9	≥0.9
Rated input current	≤0.1A	≤0.2A
Full load output Voltage	DC65-75V	DC65-75V
Rated output current	220mA	250mA
Output current range	220mA±5%	250mA±5%
Power tolerance	±5%	±5%
Current output tolerance	±5%	±5%
Dimming range	8%-100%	—
Dimmer	Triac dimmers	—
Short circuit protection	PASS	PASS
Over voltage protection	PASS	PASS
Over temperature protection	PASS	PASS
THD	≤20% @ 230V	≤20% @ 230V
Withstand voltage	—	—





Fixture Compatibility

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
18W	II	IP54	-20°C~45°C	0~90%	-20°C~65°C


Spectral Distribution

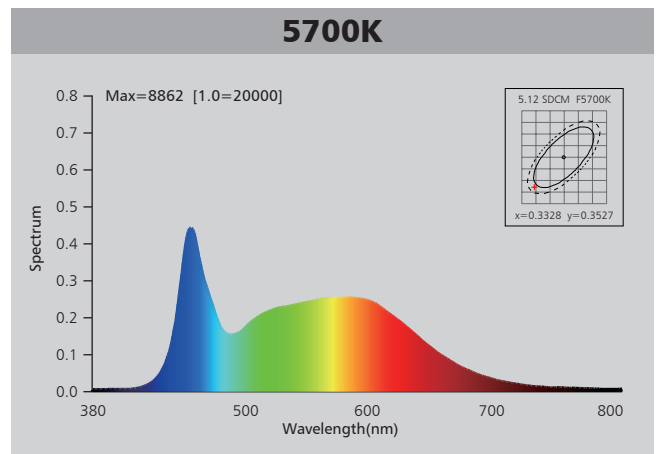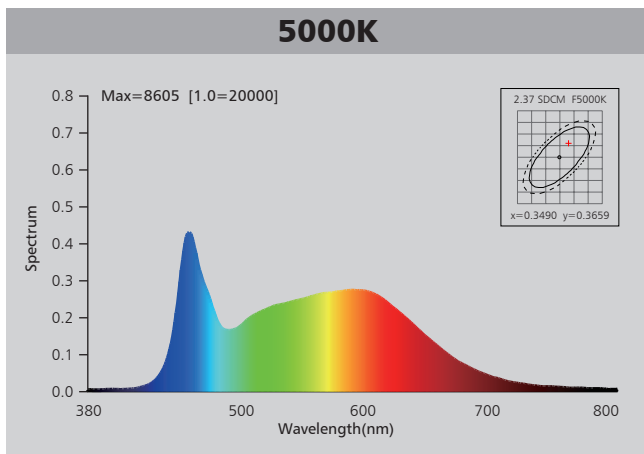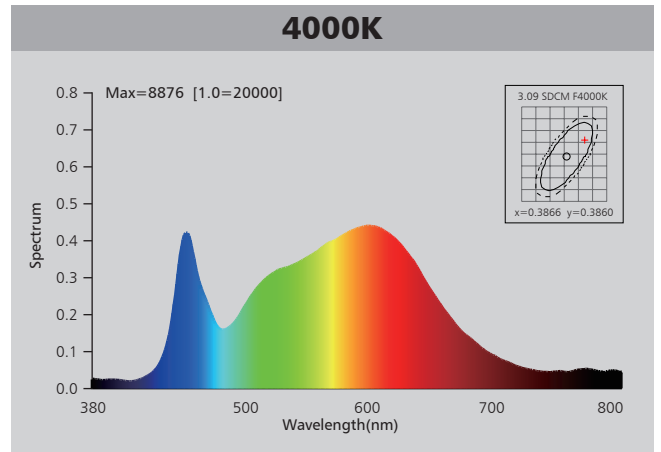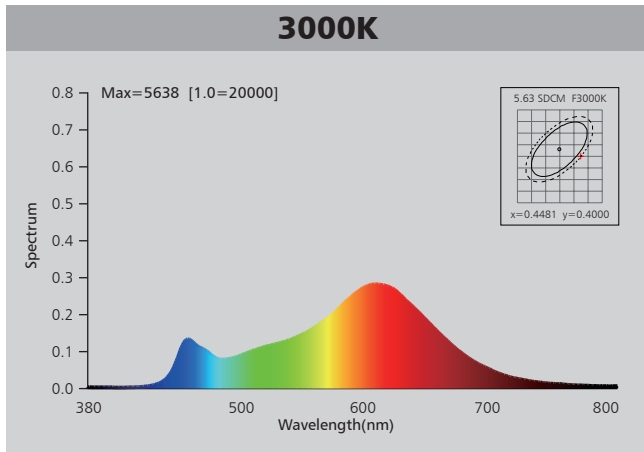



Photometric Diagram

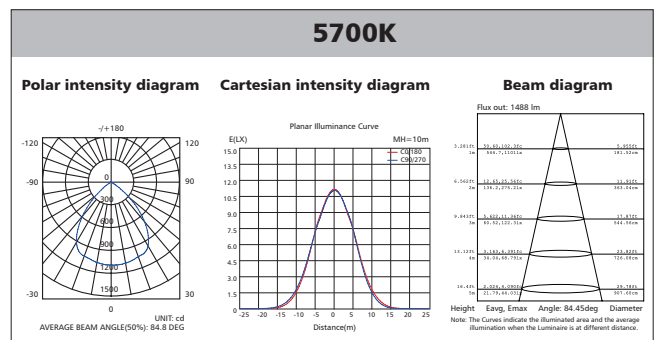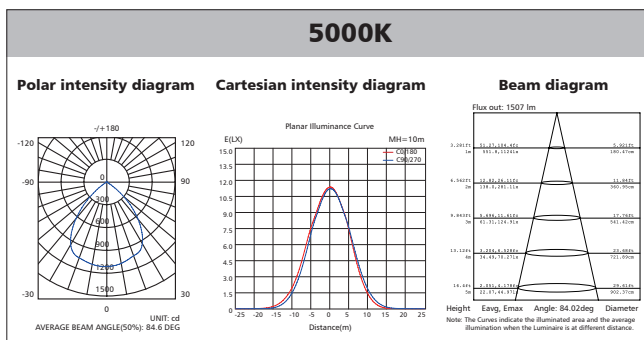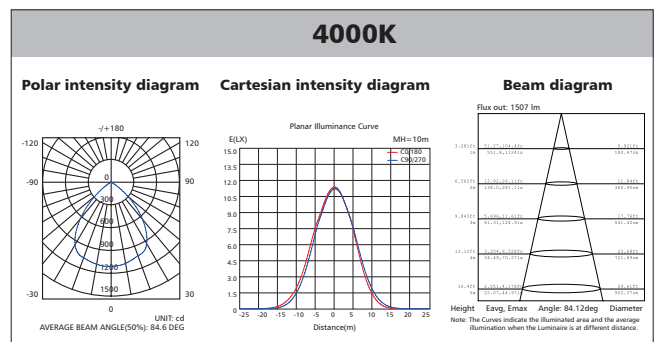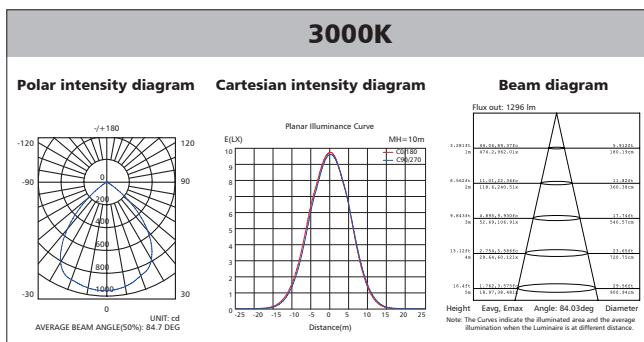

Polar Diagram Comparison

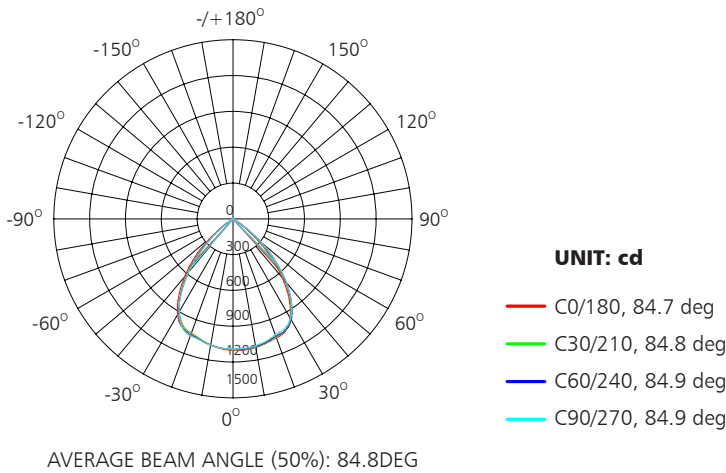


Driver lifetime & LED light decay rate

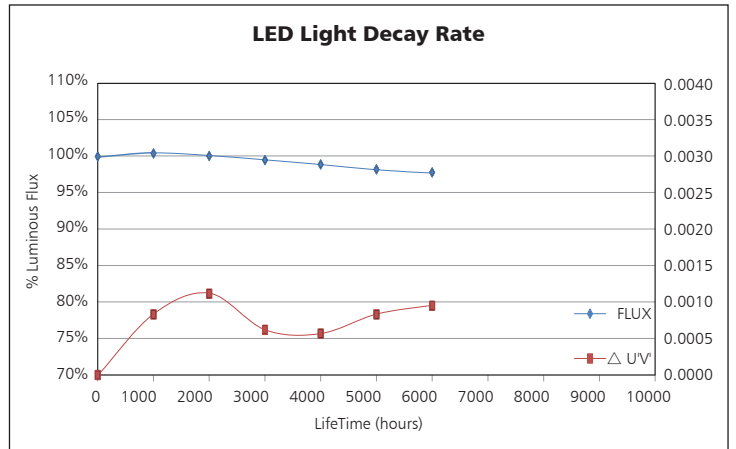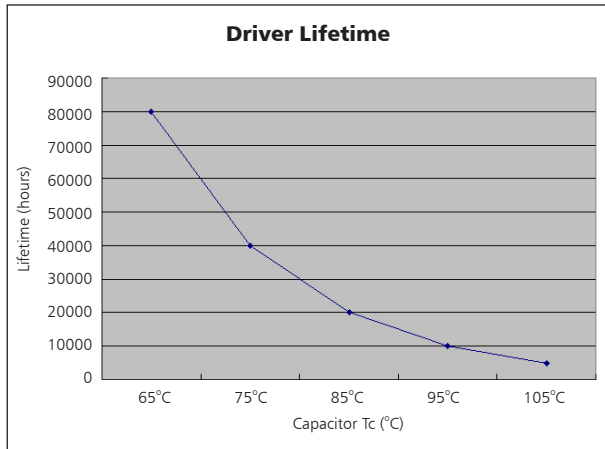


Temperature

- The testing is operated at 25°C
- The lifetime of capacitor, minimum of 5,000 hours if operated at 105°C, will be doubled whenever the temperature drops 10°C
- The highest withstand temperature of IC, MOS could be 120°C
- The highest withstand temperature of LED junction temperature is 150°C

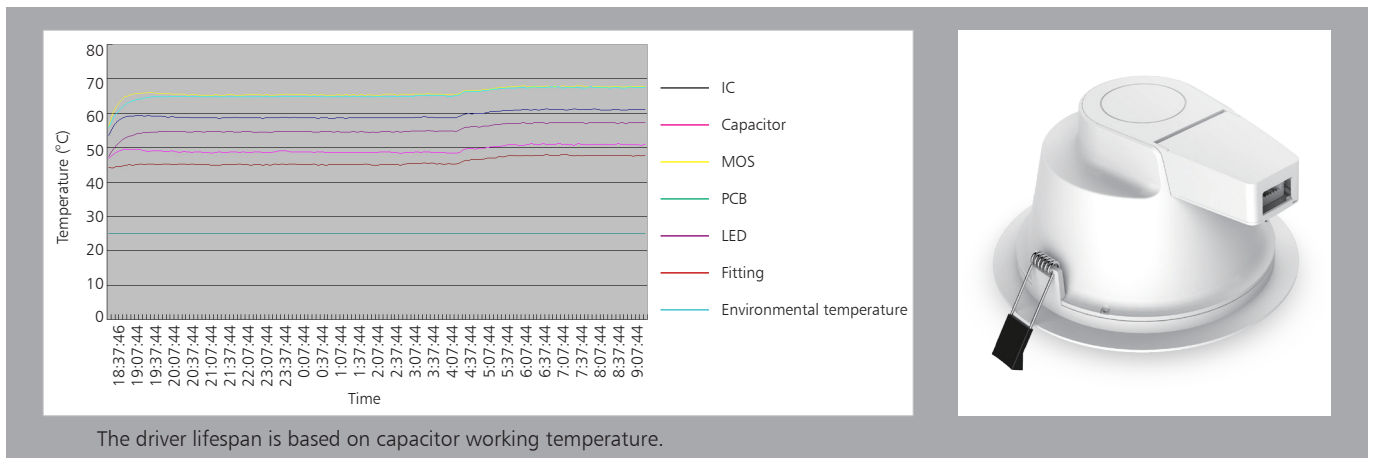

Installation

Install requirements	
A-gap above the fitting	25mm
B-gap to the building material	25mm
C-gap to the thermal insulation	25mm

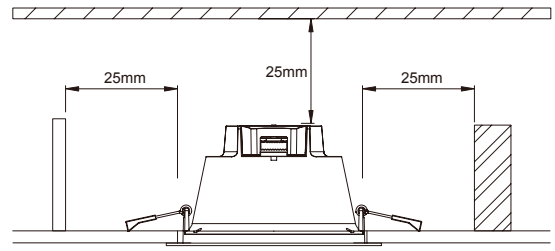

1. Open a hole according to the cutout size of led downlight.

Figure 1

2. Open the line pressing cover, see Figure 1. (Model dependent): Choose the CCT by slide switch, see Figure 2.

3. Put the main AC wire through line pressing clip, feed the L.N to the fast connection terminal block respectively then compress the line pressing clip.

Legend:
— L = Brown
— N = Blue

4. Close the line pressing cover tightly.

5. Hold back spring clips then push downlight into the hole.

6. Make sure the downlight fixed tightly in ceiling, turn on the power.

Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	41*41*44	0.35	6	12

	CTNS	Q'TY(PCS)	VOLUME(CBM)
20" standard container	372	4464	28
40" standard container	746	8952	56

