




Up-shine[®] Lighting

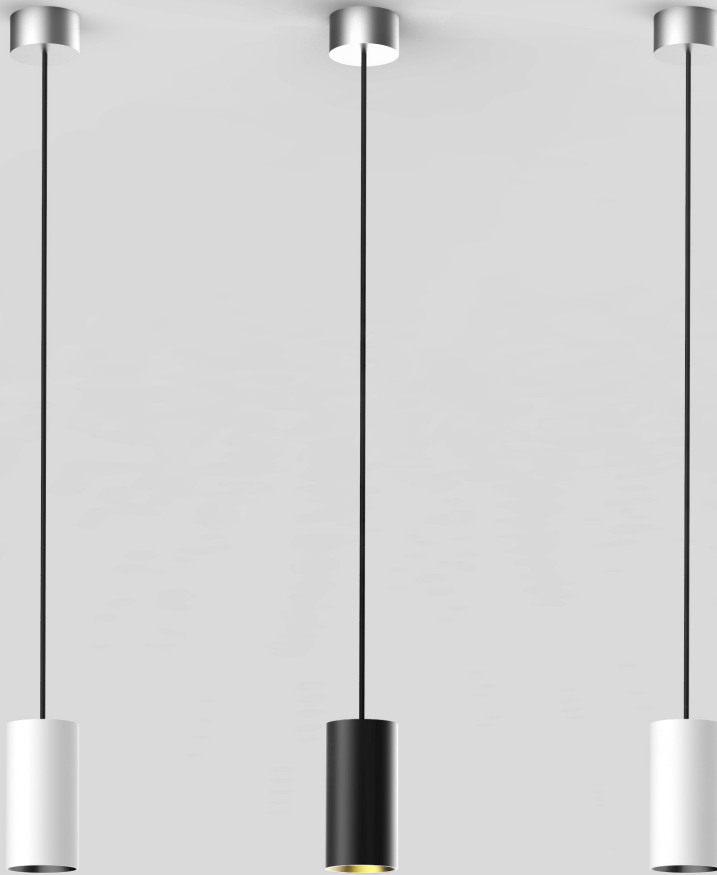

Technical Application
Guide for UP-SHINE
LED Cylinder

UP-PD02A-25W

Introduction



PD02 whole lamp adopts straightforward design with stylish appearance, easy to install, simple and generous, paying more attention to leisure and comfort. It gives space a clear and lively feelings. The color of surface ring is replaceable, which could create diversified light atmosphere according to different environment.

Suspension wire adopts pull-resistance triple-core wire wrapped with woven cloth. It enhances the tensile strength and easily install compared to steel wire. The lamp adopts high quality reflector which has good reflective rate and light output > 86%. AL6063 Aluminum radiator in sand blast oxidation treatment provides excellent heat dissipation and corrosion resistance. LEDs are high lumen COB chip with CRI>80. Built-in driver is independent and replaceable, which is friendly maintenance. PF>0.9, THD<20%, passed EMC test with strong anti-jamming capability. Besides, it possesses short-circuit protection and overvoltage protection function, showing high safety performance.

- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- 10°/24°/36° wide beam angle
- CCT: 2700K 3000K
4000K 5000K
- No UV/IR light
- Environment friendly, without Mercury or any other hazardous substances

Application notes

- IP40 for indoor use only
- Professional electrician for installation only
- Switch off before installation
- Do not touch when in use
- Keep away from hot steam and corrosive gas


Application Areas

Applicable for residential lighting in bedroom, living room, corridor etc, also suitable for commercial lighting in office, hotel, restaurant etc.

Certificate



Product Information

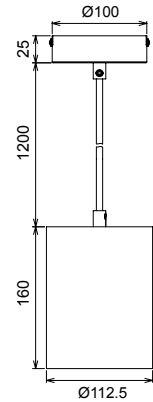

Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam angle	CCT	Lifespan	CRI	Dimmable	Dimension
UP-PD02A-25W	AC100-240V	25W	≥0.9	1970	10°/24°/36°	2700K	40000h	≥80	No	Ø112.5*160mm
UP-PD02A-25W	AC100-240V	25W	≥0.9	1880	10°/24°/36°	3000K	40000h	≥80	No	Ø112.5*160mm
UP-PD02A-25W	AC100-240V	25W	≥0.9	2050	10°/24°/36°	4000K	40000h	≥80	No	Ø112.5*160mm
UP-PD02A-25W	AC100-240V	25W	≥0.9	2190	10°/24°/36°	5000K	40000h	≥80	No	Ø112.5*160mm
UP-PD02A-25W-D	AC230V	25W	≥0.9	1870	10°/24°/36°	2700K	40000h	≥80	Yes	Ø112.5*160mm
UP-PD02A-25W-D	AC230V	25W	≥0.9	1780	10°/24°/36°	3000K	40000h	≥80	Yes	Ø112.5*160mm
UP-PD02A-25W-D	AC230V	25W	≥0.9	1950	10°/24°/36°	4000K	40000h	≥80	Yes	Ø112.5*160mm
UP-PD02A-25W-D	AC230V	25W	≥0.9	2080	10°/24°/36°	5000K	40000h	≥80	Yes	Ø112.5*160mm





Driver data Sheet

Driver data	DIM	Non dim
Input rated Voltage	AC230V	AC100-240V
Frequency	50Hz	50/60Hz
Input Voltage	AC220-240V	AC85-265V
Efficiency	≥85%	≥90%
Total load Wattage	25W±5%	25W±5%
Power Factor	≥0.9	≥0.9
Rated input current	≤0.14A	≤0.28A
Full load output Voltage	DC60-75V	DC60-75V
Rated output current	300mA	310mA
Output current range	300mA±5%	310mA±5%
Power tolerance	±5%	±5%
Current output tolerance	±5%	±5%
Dimming range	8%-100%	—
Dimmer	Triac dimmers	—
Short circuit protection	PASS	PASS
Over voltage protection	PASS	PASS
Over temperature protection	PASS	PASS
THD	≤20%	≤20%
Withstand voltage	—	—





Fixture Compatibility

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
25W	I	IP40	-20°C~45°C	0~90%	-20°C~65°C


Spectral Distribution

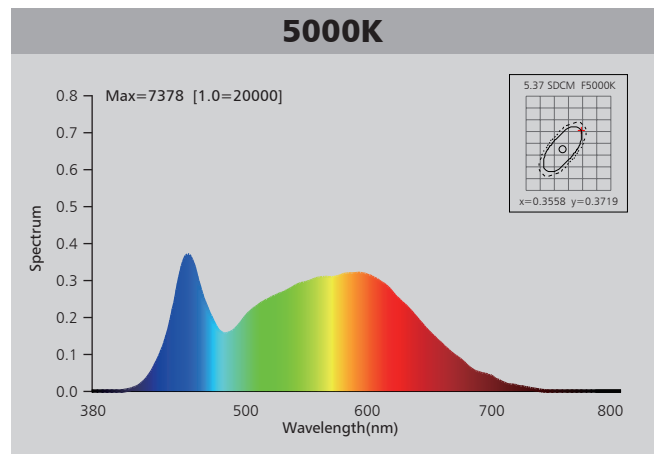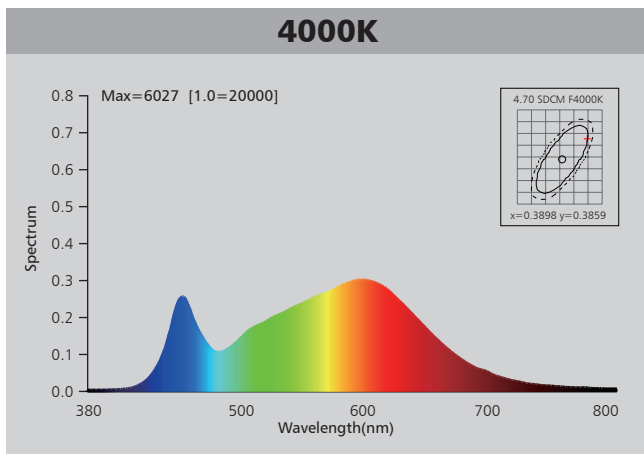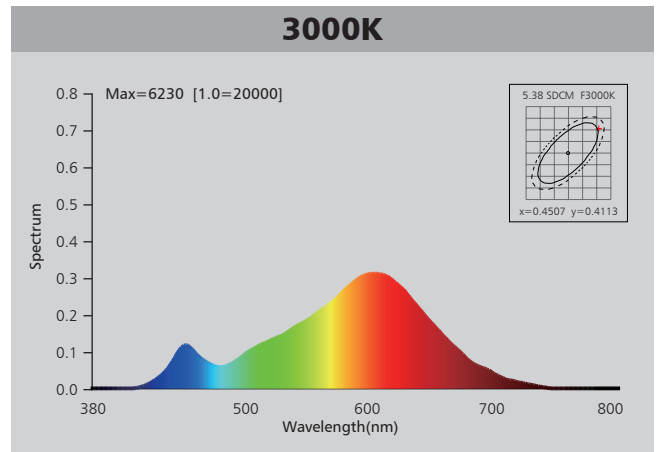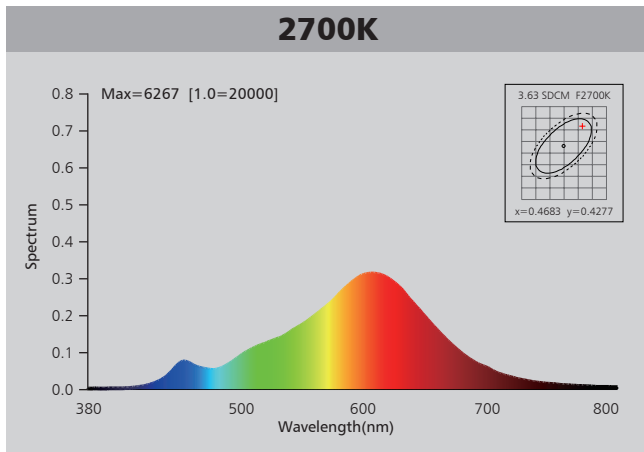

Photometric Diagram

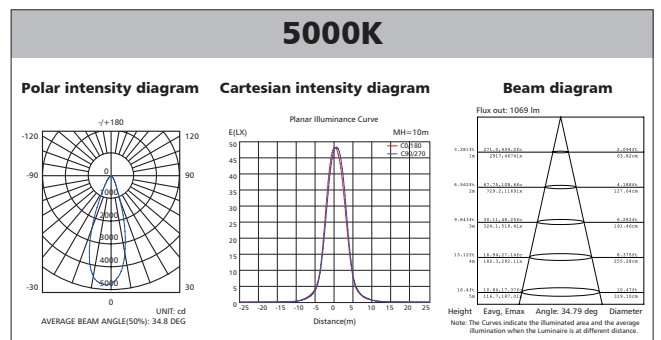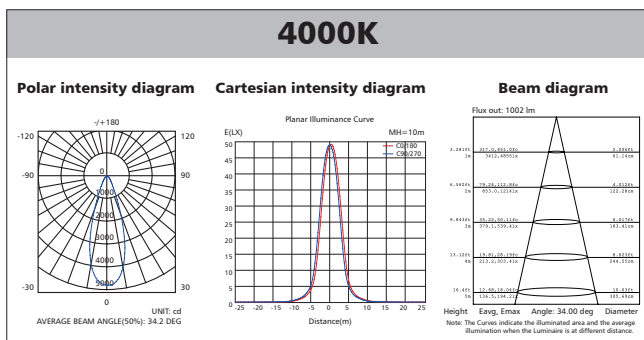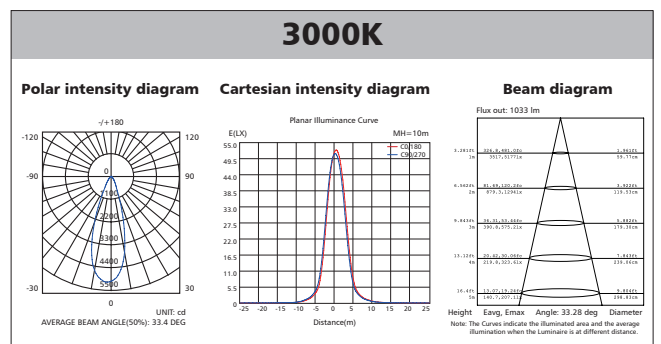
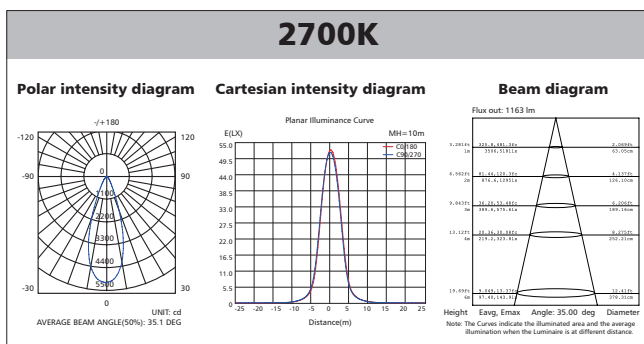


Polar Diagram Comparison

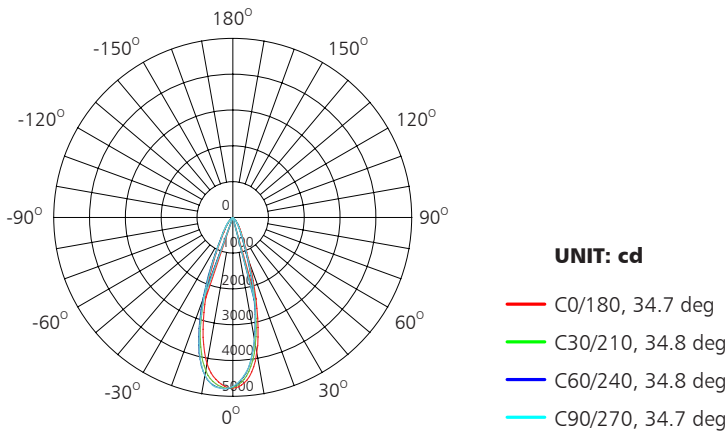

AVERAGE BEAM ANGLE (50%): 34.8DEG

Driver lifetime & LED light decay rate

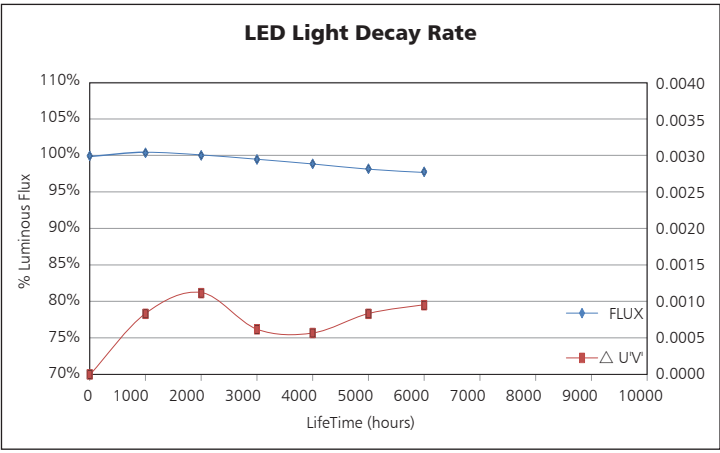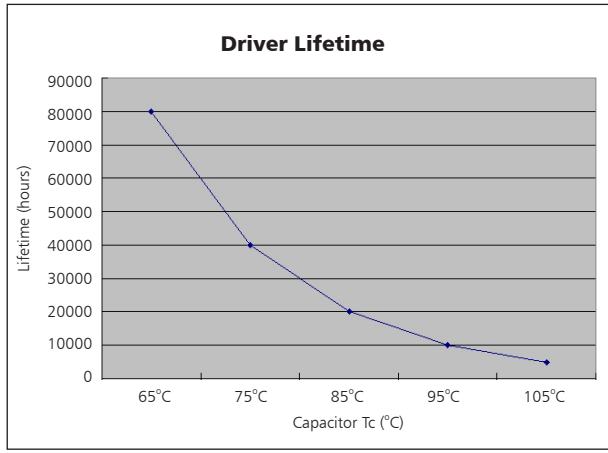

Temperature

- The testing is operated at 25°C
- The lifetime of capacitor, minimum of 5,000 hours if operated at 105°C, will be doubled whenever the temperature drops 10°C
- The highest withstand temperature of IC, MOS could be 120°C
- The highest withstand temperature of LED junction temperature is 150°C

The driver lifespan is based on capacitor working temperature.

Installation

1 Take out the accessories from accessory box.

2 Determine mounting location and knock the plastic anchor into ceiling, fix bracket with screw into the ceiling.

3 Take out the lamp, connect the corresponding polarities between the wires on the ceiling and terminal block by screwdriver.

4 Proper alignment of mounting holes between back plate and mounting bracket, then lock them together with screw.

Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCs)
Carton	50*38*47	0.95	23	24

	CTNS	Q'TY(PCs)	VOLUME(CBM)
20" standard container	310	7440	28
40" standard container	620	14880	56

