



More Products, Please click

🔍 www.upshine.com

 Up-shine® Lighting

Up-shine Lighting Co., Limited

地址：广东省深圳市宝安区福永街道福园一路鼎丰高新产业园 2 栋
2nd building Dingfeng High-Tech Zone, Fuyuan 1st road,
Fuyong Sub-district, Bao'an, Shenzhen China

Tel: +86-755-29197332

Fax: +86-755-29197301

E-mail: info@upshine.com

Web: www.upshine.com


Zip code: 518103



*Intelligent,
makes life easier!*



Multi-functional Products Catalogue



 Up-shine® Lighting



COMPANY PROFILE



Founded in 2007, as a leading LED indoor lighting manufacturer, Up-shine has built a good reputation at home and abroad with top quality products, advanced lighting solution and cheerful after-sales service.

Up-shine devotes itself in researching, developing and manufacturing a full range of lighting products with most cost-effective solution. We've committed to improving ourselves paying more attention to customer demand, focusing on making people's life more safe and comfortable, enabling them to enjoy new technology and efficient use of resources.

Covers an area of 15000 square meters, equipped with over 500 front-line employees and 56 qualified engineers, Up-shine is growing up very fast as a medium sized enterprise. 36 outstanding staff serve quality department, forming a high level quality system, which provides us a favorable pullulating environment.

With clear marketing orientation, sustained technical innovation and internationally -updated management philosophy, Up-shine must be a great choice as your reliable long-term partner, you can count on us to provide all possible lighting service.


Office



Workshop



Testing instrument & Production equipment

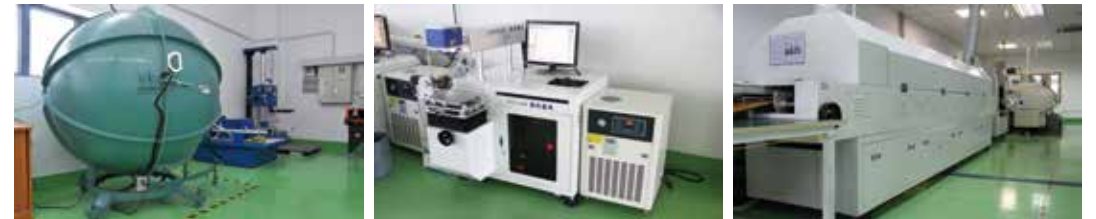

COMPANY CULTURE

- Honesty Culture: Honesty is the foundation of all, being the first rule of every action!
- Customer Culture: Nothing is important, but you!
- Innovation Culture: Lighting the world through innovation!
- Service Culture: Always here for you!
- Responsibility Culture: Keep the world green, reduce power plant emissions, go LED today!

2.4G&Wifi Intelligent Control



2700K~3000K 3000K~4000K 4000K~5000K 5000K~5700K





2.4G Remote controller



2.4G Wireless wall touch switch



WiFi Box (Mobile App)



Color Changeable



Dimmable



Timing



50% Brightness



Night Lamp



30m Distance




2700K~5700K Changeable

Color Changeable







Creating fantastic atmosphere by flexible CCT changing between warm white, natural white and day light, the color changing items are controlled by remote controller, wall touch switch or smart phone APP.



8%~100% Dimmable


Dimmable






Dimmable from 8~100% brightness with timing and night lamp function, diversified scene setting, creating a humanized smart control system.

LED Light for 2.4G & Wifi Intelligent Control




Model: UP-CL59

Voltage: AC200-240V
 Power: 7W / 10W / 13W / 18W / 25W / 35W / 45W
 CCT: 3000K~5700K
 Beam angle: 90°
 Lumen: 80lm/W
 Cut out: Ø60-70mm, Ø70-75mm, Ø90-100mm, Ø120-130mm, Ø140-150mm, Ø160-170mm, Ø200-210mm, Ø230-260mm




Model: UP-CL22

Voltage: AC200-240V
 Power: 10W / 13W
 CCT: 3000K~5700K
 Beam angle: 90°
 Lumen: 80lm/W
 Cut out: Ø70-75mm, Ø90-95mm



Model: UP-AL02

Voltage: AC200-240V
 Power: 15W / 25W
 CCT: 3000K~5700K
 Beam angle: 120°
 Lumen: 80lm/W
 Product size: Ø275x100mm, Ø350x110mm




Model: UP-PL-G2

Voltage: AC200-240V
 Power: 18W / 36W
 CCT: 3000K~5700K
 Beam angle: 120°
 Lumen: 80lm/W
 Product size: 300x300mm, 300x600mm, 600x600mm




P Wall Switch Function

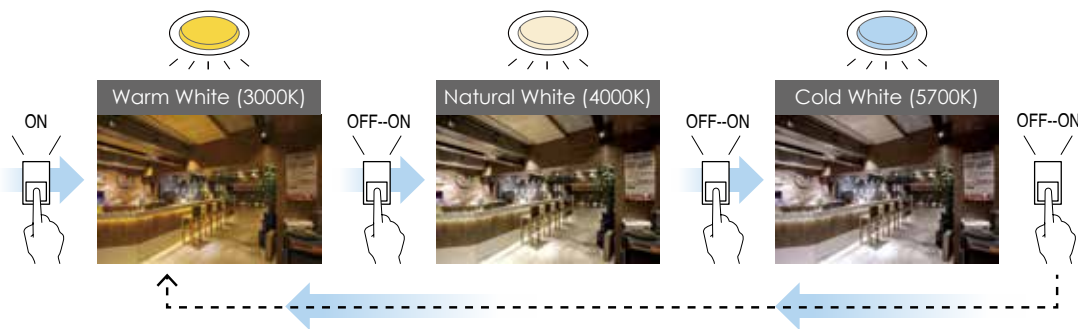

Three colors in one LED lamp

Advantages:

- Color changing: from 3000K to 4000K to 5700K.
- Dimmable: compatible with most triac dimmers.
- Memory: remember the color you have chosen.
- Reset: easy come back to the initial color.

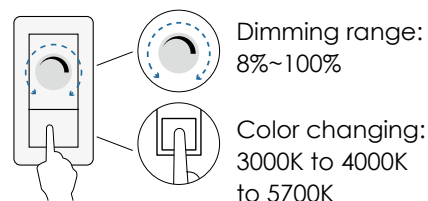

P3 Slide Switch Function



Three colors in one LED lamp

Advantages:

- Dial switch , one light has three colour optional, easy choose colour by button on the back of light fitting.
- Color changing: from 3000K to 4000K to 5700K.
- Dimmable: compatible with most triac dimmers.
- Memory: remember the color you have chosen.
- Reset: easy come back to the initial color.

LED Light for Wall Switch & Slide Switch function


Model: UP-CL59-P / UP-CL59-P3
 Switch mode: Wall switch / Slide switch
 Voltage: AC200-240V
 Power: 10W / 13W / 18W / 25W / 35W
 CCT: 3000K, 4000K, 5700K
 Beam angle: 90°
 Lumen: 80lm/W
 Cut out: Ø90-100mm, Ø120-130mm, Ø140-150mm, Ø160-170mm, Ø200-210mm

Model: UP-AL08-12-P / AL08-12-P3
 Switch mode: Wall switch / Slide switch
 Voltage: AC200-240V
 Power: 18W / 25W
 CCT: 3000K, 4000K, 5700K
 Beam angle: 120°
 Lumen: 80lm/W
 Product size: Ø300x40mm

Model: UP-PL-G2-P / UP-PL-G2-P3
 Switch mode: Wall switch / Slide switch
 Voltage: AC200-240V
 Power: 36W / 45W
 CCT: 3000K, 4000K, 5700K
 Beam angle: 120°
 Lumen: 80lm/W
 Product size: 600x600mm




External Emergency Function

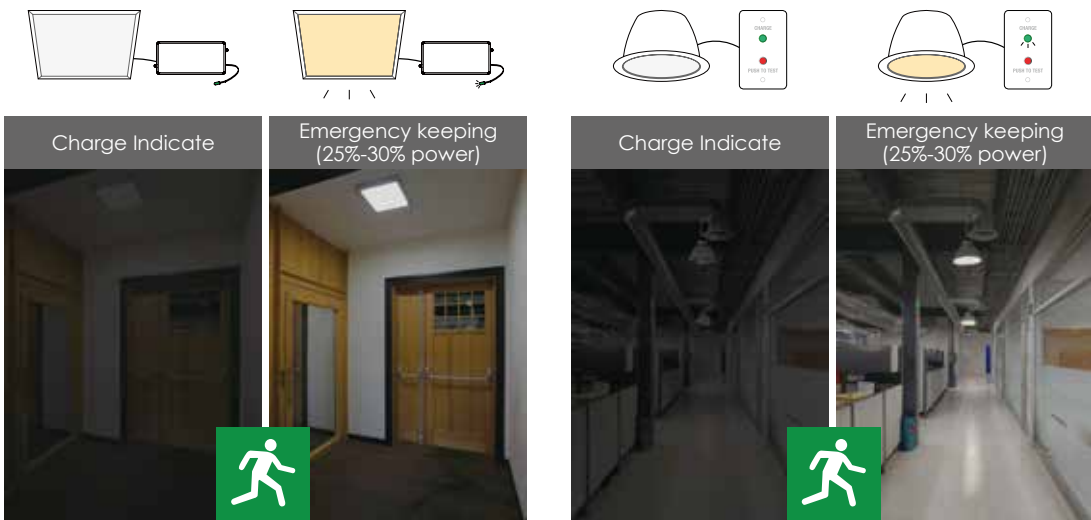

<p>External Emergency driver for Europe</p> <ul style="list-style-type: none"> Emergency power: 4W / 10W Voltage: AC200-240V Duration: 3hrs Charging time: 24hrs 	<p>Led Light for Emergency function</p>  <p>(Apply to SMD / COB downlights, panel lights, ceiling lights)</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


<p>External Emergency driver for North America</p> <ul style="list-style-type: none"> Emergency power: 4W / 10W / 25W Voltage: AC120-277V Duration: 3hrs Charging time: 24hrs 	<p>Led Light for Emergency function</p>  <p>(Apply to SMD / COB downlights, panel lights)</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

External Sensor Function

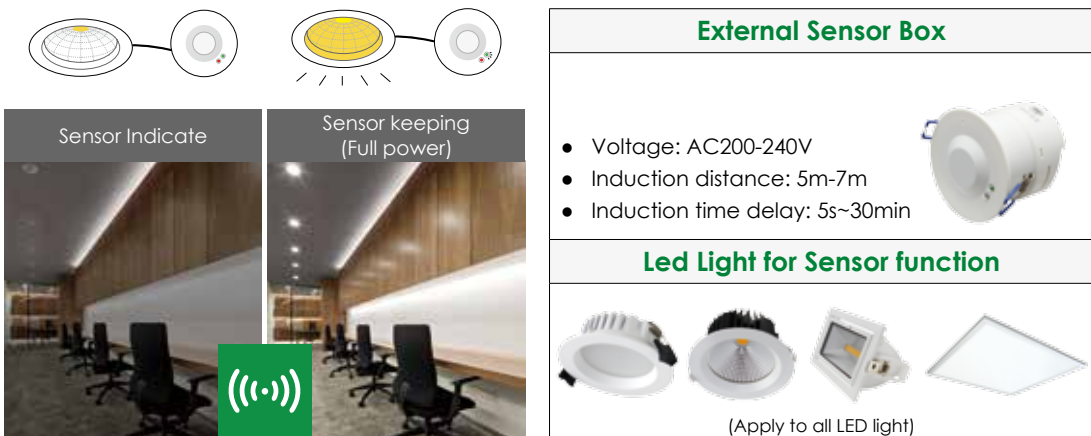

<p>External Sensor Box</p> <ul style="list-style-type: none"> Voltage: AC200-240V Induction distance: 5m-7m Induction time delay: 5s~30min 
<p>Led Light for Sensor function</p>  <p>(Apply to all LED light)</p>

Built-in Emergency & Sensor Function

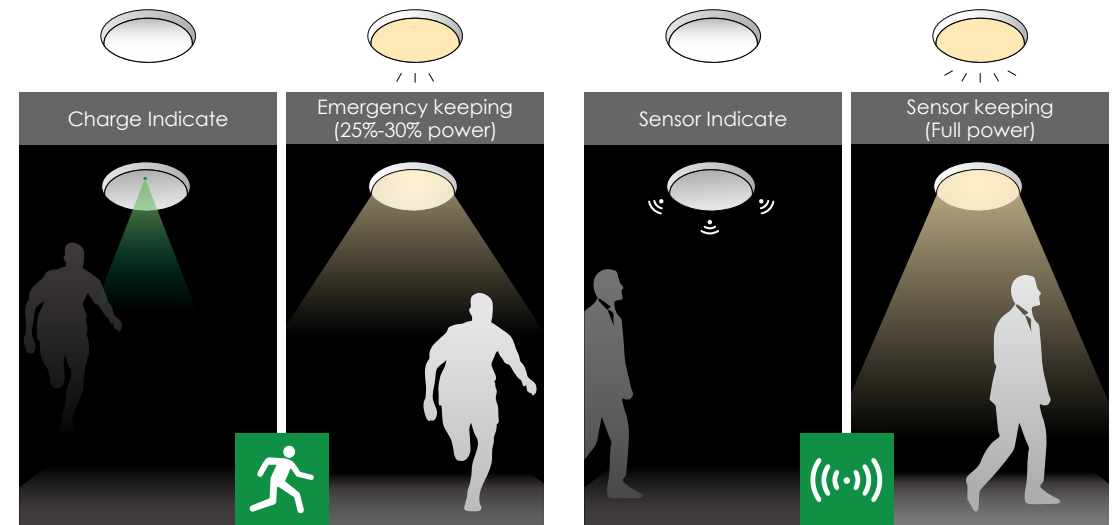


Emergency Function


- Emergency power: 4W
- Emergency time: 3hrs
- Charging time: 24hrs

Sensor Function

- Induction distance: 5m-7m
- Induction time delay: 30s

LED Light for Built-in Emergency & Sensor function

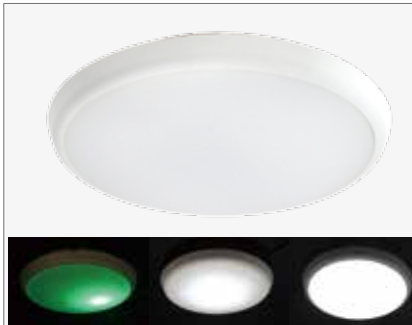	<p>Model: UP-AL08-M</p> <p>Voltage: AC200-240V</p> <p>Power: 12W / 18W / 25W / 30W</p> <p>CCT: 3000K, 4000K, 5000K, 5700K</p> <p>Beam angle: 120°</p> <p>Lumen: 85lm/W</p> <p>Product size: Ø200x48mm, Ø250x48mm, Ø300x48mm</p>
---------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

	<p>Model: UP-AL06-BO / UP-AL08-BT</p> <p>Voltage: AC220-240V</p> <p>Power: 9W / 18W / 25W / 36W / 50W</p> <p>CCT: 3000K, 4000K, 5000K, 5700K</p> <p>Beam angle: 120°</p> <p>Lumen: 85lm/W</p> <p>Product size: 624x120x108mm, 1232x120x108mm, 1535x120x108mm</p>
---------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

\\ \b NOTE \/\

A series of horizontal lines for writing notes.