


2016-II UP-SHINE LED PANEL LIGHT SERIES

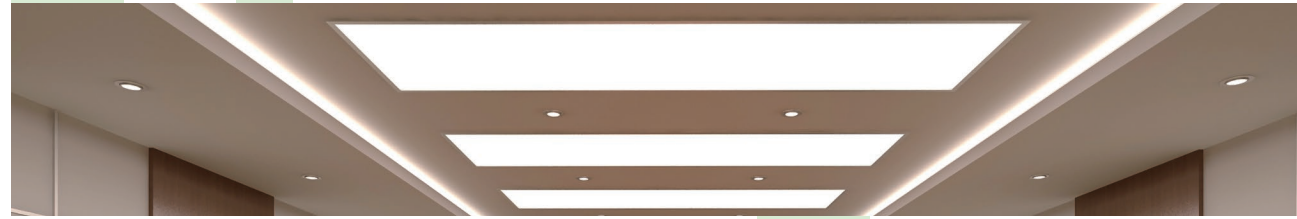

Up-shine Lighting Co., Limited

地址：广东省深圳市宝安区福永街道福园一路鼎丰高新产业园 2 栋

2nd building Dingfeng High-Tech Zone, Fuyuan 1st road,

Fuyong Sub-district, Bao'an, Shenzhen China

Tel: +86-755-29197332

Fax: +86-755-29197301

E-mail: info@upshine.com


Web: www.upshine.com

Zip code: 518103





PL3030 / PL3060 / PL6060 / PL30120 / PL60120



COMPANY PROFILE



Founded in 2007, as a leading LED indoor lighting manufacturer, Up-shine has built a good reputation at home and abroad with top quality products, advanced lighting solution and cheerful after-sales service.

Up-shine devotes itself in researching, developing and manufacturing a full range of lighting products with most cost-effective solution. We've committed to improving ourselves paying more attention to customer demand, focusing on making people's life more safe and comfortable, enabling them to enjoy new technology and efficient use of resources.

Covers an area of 15000 square meters, equipped with over 500 front-line employees and 56 qualified engineers, Up-shine is growing up very fast as a medium sized enterprise. 36 outstanding staff serve quality department, forming a high level quality system, which provides us a favorable pullulating environment.

With clear marketing orientation, sustained technical innovation and internationally -updated management philosophy, Up-shine must be a great choice as your reliable long-term partner, you can count on us to provide all possible lighting service.

Technical Specifications

Voltage: AC100-240V / AC200-240V
 Power: 18W / 36W / 45W / 56W / 72W
 Power Factor: ≥0.9
 Beam angle: 120°
 CCT: 3000K 4000K 5000K 5700K

Lifespan: 40000hrs
 CRI: ≥80
 IP: 40
 Dimmable: Triac / 0-10V / DALI dimmable
 Surface color: Silver / White

Model	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
	3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
UP-PL3030-18W	1230	1300	1320	1340	1190	1260	1280	1300
UP-PL3030-36W	2420	2600	2630	2670	2380	220	2560	2600
UP-PL3060-36W	2420	2600	2630	2670	2380	2520	2560	2600
UP-PL6060-36W	2550	2700	2730	2760	2480	2620	2660	2690
UP-PL6060-45W	3060	3240	3290	3330	2950	3150	3200	3240
UP-PL6060-56W	3800	4030	4090	4140	3660	3920	3980	4040
UP-PL30120-36W	2450	2590	2630	2670	2400	2600	2640	2680
UP-PL30120-45W	3060	3240	3290	3330	2950	3150	3200	3240
UP-PL60120-72W	5630	5900	6100	6150	—	—	—	—

Double Side Emitting Panel Light PL6060 / 30120 / 60120-L



Light Effect: 70% downward,
30% upward.

Technical Specifications

Voltage: AC100-240V / AC200-240V
Power: 45W / 72W
Power Factor: ≥0.9
Beam angle: 120°
CCT: 3000K 4000K 5000K 5700K

Lifespan: 40000hrs
CRI: ≥80
IP: 40
Dimmable: Triac / 0-10V / DALI dimmable
Surface color: White / Silver

Model	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
	3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
UP-PL6060-45W-L	2850	3000	3050	3100	2700	2750	2780	2790
UP-PL30120-45W-L	2850	3000	3050	3100	2700	2750	2780	2790
UP-PL60120-72W-L	4520	4650	4720	4770	—	—	—	—

Frameless Panel Light PL3030 / 3060 / 6060 / 30120-P



Technical Specifications

Voltage: AC100-240V / AC200-240V
Power: 18W / 36W / 45W
Power Factor: ≥0.9
Beam angle: 120°
CCT: 3000K 4000K 5000K 5700K

Lifespan: 40000hrs
CRI: ≥80
IP: 40
Dimmable: Triac / 0-10V / DALI dimmable
Surface color: White / Silver

Model	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
	3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
UP-PL3030-18W-P	1250	1320	1300	1270	1200	1250	1170	1150
UP-PL3060-36W-P	2700	2800	2880	2900	—	—	—	—
UP-PL6060-36W-P	2700	2800	2880	2900	—	—	—	—
UP-PL6060-45W-P	3700	3800	3850	3950	3550	3600	3680	3750
UP-PL30120-45W-P	3750	3820	3870	3910	3540	3630	3690	3750
UP-PLA1-45W-P	3500	3600	3700	3800	—	—	—	—
UP-PLA2-36W-P	—	—	—	2556	—	—	—	—
UP-PLA4-18W-P	1400	1450	1500	1550	—	—	—	—

Waterproof Panel Light PL3030 / PL6060-U



Technical Specifications

Voltage: AC100-240V
Power: 18W / 45W
Power Factor: ≥0.9
Beam angle: 120°
CCT: 3000K 4000K 5000K 5700K

Lifespan: 40000hrs
CRI: ≥80
IP: 54
Dimmable: No
Surface color: White / Silver

Model	Non-DIM Lumen (±5%)			
	3000K	4000K	5000K	5700K
UP-PL3030-18W-U	1220	1270	1350	1300
UP-PL6060-45W-U	3020	3310	3400	3240

Grille panel light GL6060 / 30120 / 60120-B



Technical Specifications

Voltage: AC100-240V / AC200-240V
Power: 33W / 45W / 72W
Power Factor: ≥0.9
Beam angle: 90°
CCT: 3000K 4000K 5000K 5700K

Lifespan: 40000hrs
CRI: ≥80
IP: 20
Dimmable: Triac / 0-10V / DALI dimmable
Surface color: White / Silver

Model	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
	3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
UP-GL6060-33W-B	3100	3300	3250	3250	3000	3150	3100	3100
UP-GL6060-45W-B	4150	4450	4250	4350	4000	4250	4050	4150
UP-GL30120-33W-B	3000	3150	3100	3100	2800	3000	2950	2950
UP-GL60120-72W-B	6250	6700	6450	6550	—	—	—	—

Pendant Panel Light PL3012 / PL4012 / PL5012 / PL6012-W




Technical Specifications

Voltage: AC100-240V / AC200-240V
 Power: 18W / 25W / 30W / 35W
 Power Factor: ≥0.9
 Beam angle: 120°
 CCT: 3000K 4000K 5000K 5700K

Lifespan: 40000hrs
 CRI: ≥80
 IP: 40
 Dimmable: Triac / 0-10V / DALI dimmable
 Surface color: White

Model	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
	3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
UP-PL3012-18W-W	1460	1475	1420	1560	1295	1330	1360	1450
UP-PL4012-25W-W	2020	2100	2150	2170	2000	2050	2100	2120
UP-PL4012-35W-W	2870	2970	3040	3080	2830	2900	2970	3010
UP-PL5012-30W-W	2140	2200	2340	2460	2310	2220	2460	2520
UP-PL5012-35W-W	2550	2620	2760	2835	2590	2625	2870	2900
UP-PL6012-35W-W	2830	2940	3010	3040	2800	2870	2900	2940

Round Panel Light PL14519 / PL1819 / PL2019 / PL2419 / PL3019

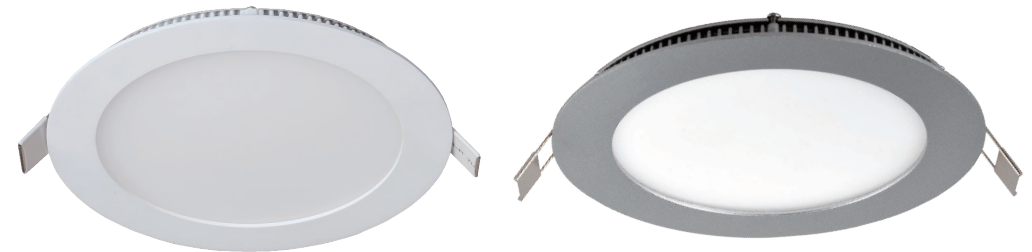

Technical Specifications

Voltage: AC100-240V / AC200-240V
 Power: 7W / 10W / 15W / 20W
 Power Factor: ≥0.9
 Beam angle: 120°
 CCT: 3000K 4000K 5000K 5700K

Lifespan: 40000hrs
 CRI: ≥80
 IP: 40
 Dimmable: Triac dimmable / 0-10V dimmable
 Surface color: White / Silver

Model	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
	3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
UP-PL14519-7W	470	490	530	550	430	470	490	500
UP-PL1819-10W	680	700	750	780	620	670	700	720
UP-PL2019-10W	680	700	750	780	620	670	700	720
UP-PL2219-15W	1000	1050	1100	1130	900	970	1000	1030
UP-PL2419-15W	980	1050	1100	1180	950	990	1080	1130
UP-PL2419-20W	1190	1260	1340	1460	1060	1140	1220	1320
UP-PL3019-20W	1380	1450	1480	1520	1280	1350	1380	1420

Upgraded Frameless Panel Light PL3030 / 6060-AC



Technical Specifications

Voltage: AC200-240V
 Power: 18W / 37W / 45W
 Power Factor: ≥0.9
 Beam angle: 120°
 CCT: 3000K 4000K 5000K 5700K

Lifespan: 40000hrs
 CRI: ≥80
 IP: 40
 Dimmable: Triac / 0-10V / DALI dimmable

Model	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
	3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
UP-PL3030-18W-AD	1380	1580	1620	1650	1340	1540	1580	1610
UP-PL6060-37W-AD	2700	3050	3070	3110	2640	2960	3100	3130
UP-PL6060-45W-AD	3420	3825	3825	3910	3280	3690	3690	3780

LED Panel Light PL30120 / 6060-AD



Technical Specifications

Voltage: AC200-240V
 Power: 35W / 45W
 Power Factor: ≥0.9
 Beam angle: 120°
 CCT: 3000K 4000K 5000K 5700K

Lifespan: 40000hrs
 CRI: ≥80
 IP: 40
 Dimmable: Triac / 0-10V / DALI dimmable
 Surface color: White

Model	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
	3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
UP-PL30120-35W-AD	2580	2800	2830	2850	2450	2670	2700	2750
UP-PL30120-45W-AD	3200	3460	3500	3550	3100	3320	3400	3420
UP-PL6060-35W-AD	2520	2830	2850	2960	2450	2760	2780	2890
UP-PL6060-45W-AD	3380	3650	3700	3750	3290	3560	3610	3660

LED Emergency Converter



Emergency driver data

Mains voltage: 100-240VAC 50/60HZ
 Output voltage: 24-38VDC
 Battery: 12.6V 4000mAh Li
 Luminaire Power: 3.6-10W
 Charge Period: 24 hours
 Battery Duration: Min. 3 hours

Emergency Switch time ≤ 1S
 Pattern: Constant
 Lifetime: ≥30000hours
 Driver Size: 235.8mm x 104mm x 51.7mm
 G.W: 0.67KG
 Temp.: -20—+50°C

UGR<19 Panel Light PL6060 / 6262 / 30120 / 60120-G3



Technical Specifications

Voltage: AC100-240V / AC200-240V
 Power: 33W / 42W / 66W
 Power Factor: ≥0.9
 Beam angle: 80°
 CCT: 3000K 4000K 5000K 5700K

Lifespan: 40000hrs
 CRI: ≥80
 IP: 40
 Dimmable: Triac / 0-10V / DALI dimmable
 Surface color: White / Silver

Model	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
	3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
UP-PL6060-33W-G3	3200	3300	3350	3400	3050	3150	3200	3250
UP-PL6060-42W-G3	4100	4200	4270	4350	3950	4050	4120	4200
UP-PL6262-33W-G3	3200	3300	3350	3400	3050	3150	3200	3250
UP-PL30120-33W-G3	3200	3300	3350	3400	3050	3150	3200	3250
UP-PL30120-42W-G3	3800	3950	4050	4150	3650	3800	3900	4000
UP-PL60120-66W-G3	6000	6250	6300	6350	—	—	—	—

