

PART1

UPSHINE DL31 Lighting Application

PART2

UPSHINE COB LED Downlight

PART3

Installation Information







24° /45° /60° wide beam angle Dimmable when using triac dimmer **W**UPSHINE


No UV/IR light


Up to 70% energy saving compared to standard CFL

PART3

Installation Information

Install requirements	
A-gap above the fitting	25mm
B-gap to the building material	25mm
C-gap to the thermal insulation	25mm



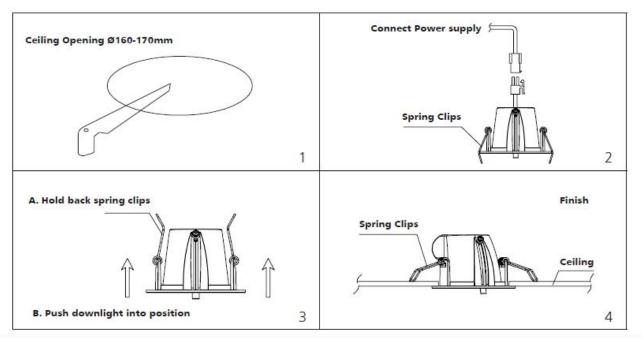





UPSHINE LED lighting gives you a best shopping environment www.upshine.com

