



Case Show

Product Introduced

Installation Notes









PART TWO Product Introduced




UPSHINE CL59 LED Downlight Light

Up-shine SMD LED Down light adopts high lumen SMD LED, PMMA diffuser with even light output.

White, silver, chrome surface treatments are available for wide choice.


Triac dimmable, 0-10V dimmable and DALI dimmable version share great popularity by excellent dimming effect.

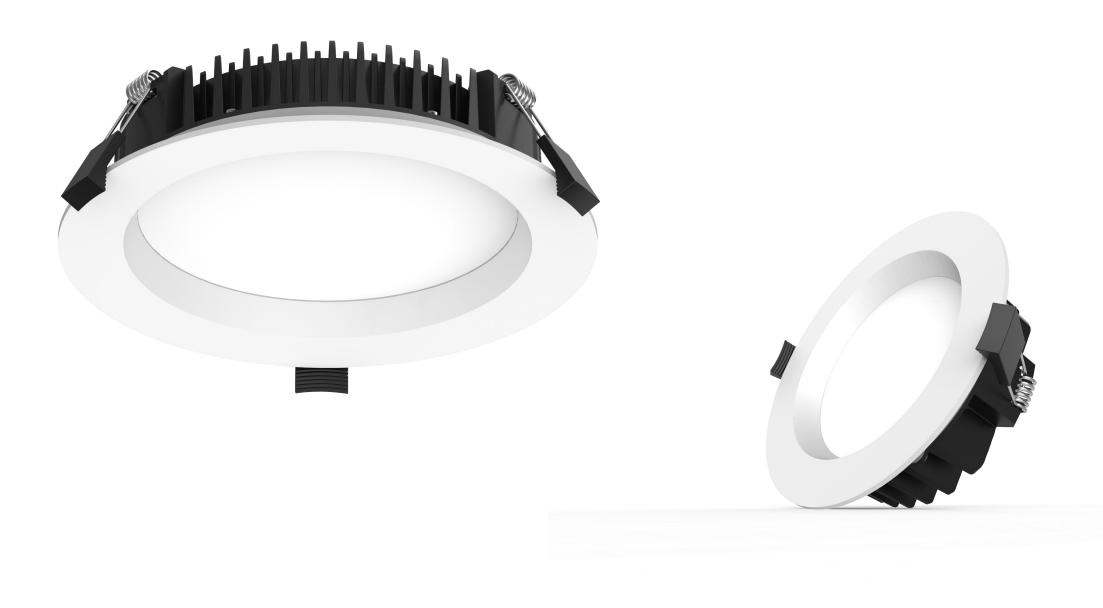




PART Three Installation Notes

Install requirements	
A-gap above the fitting	25mm
B-gap to the building material	25mm
C-gap to the thermal insulation	25mm



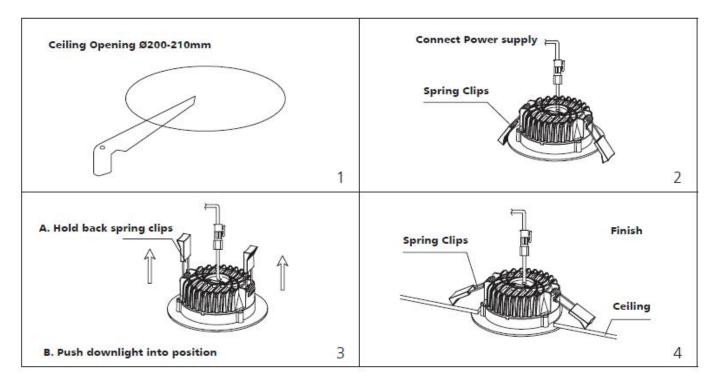

THANK

THE REPORT OF A DESIGN OF A DE

<u>inn</u>

illine.

WWW.UPSHINE.COM