



UPSHINE®



Technical Application
Guide for UP-SHINE
LED Downlight

UP-CL22-13W

Introduction



Up-shine SMD LED Down light adopts high lumen SMD LED, PMMA diffuser with even light output. White, silver, chrome surface treatments are available for wide choice. Triac dimmable, 0-10V dimmable and DALI dimmable version share great popularity by excellent dimming effect.

- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Triac dim, 0-10V dim, DALI dim
- 90° wide beam angle
- 90-95mm cutout
- CCT: 3000K 4000K
5000K 5700K
- No UV/IR light
- Environment friendly, without Mercury or any other hazardous substances

Application notes

- IP20 for indoor use only
- Professional electrician for installation only
- Switch off before installation
- Do not touch when in use
- Keep away from hot steam and corrosive gas

Application Areas


It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

Certificate

CE RoHS SAA



Product Information

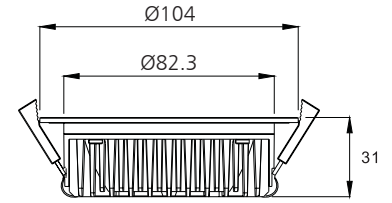

Technical Specifications

Model	Voltage	Power	Power Factor	Lumen ($\pm 5\%$)	Beam angle	CCT	Lifespan	CRI	Dimmable	Dimension
UP-CL22-13W	AC100-240V	13W	≥ 0.9	1050	90°	3000K	40000h	≥ 80	No	$\varnothing 104 \times 31$ mm cutout 90-95mm
UP-CL22-13W	AC100-240V	13W	≥ 0.9	1060	90°	4000K	40000h	≥ 80	No	$\varnothing 104 \times 31$ mm cutout 90-95mm
UP-CL22-13W	AC100-240V	13W	≥ 0.9	1065	90°	5000K	40000h	≥ 80	No	$\varnothing 104 \times 31$ mm cutout 90-95mm
UP-CL22-13W	AC100-240V	13W	≥ 0.9	1075	90°	5700K	40000h	≥ 80	No	$\varnothing 104 \times 31$ mm cutout 90-95mm
UP-CL22-13W-D	AC230V	13W	≥ 0.9	960	90°	3000K	40000h	≥ 80	Yes	$\varnothing 104 \times 31$ mm cutout 90-95mm
UP-CL22-13W-D	AC230V	13W	≥ 0.9	975	90°	4000K	40000h	≥ 80	Yes	$\varnothing 104 \times 31$ mm cutout 90-95mm
UP-CL22-13W-D	AC230V	13W	≥ 0.9	980	90°	5000K	40000h	≥ 80	Yes	$\varnothing 104 \times 31$ mm cutout 90-95mm
UP-CL22-13W-D	AC230V	13W	≥ 0.9	990	90°	5700K	40000h	≥ 80	Yes	$\varnothing 104 \times 31$ mm cutout 90-95mm





Driver data Sheet

Driver data	DIM	Non dim
Input rated Voltage	AC230V	AC100-240V
Frequency	50Hz	50/60Hz
Input Voltage	AC200-240V	AC85-265V
Efficiency	$\geq 75\%$	$\geq 85\%$
Total load Wattage	$13W \pm 1W$	$13W \pm 1W$
Power Factor	≥ 0.9	≥ 0.9
Rated input current	$\leq 0.08A$	$\leq 0.15A$
Full load output Voltage	DC26-29V	DC26-29V
Rated output current	350mA	380mA
Output current range	$350mA \pm 5\%$	$380mA \pm 5\%$
Power tolerance	$\pm 5\%$	$\pm 5\%$
Current output tolerance	$\pm 5\%$	$\pm 5\%$
Dimming range	8%-100%	—
Dimmer	Triac dimmers	—
Short circuit protection	PASS	PASS
Over voltage protection	PASS	PASS
Over temperature protection	PASS	PASS
Withstand voltage	AC3750V	AC3750V





Fixture Compatibility

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
13W	II	IP20	$-20^\circ C \sim 45^\circ C$	0~90%	$-20^\circ C \sim 65^\circ C$


Spectral Distribution

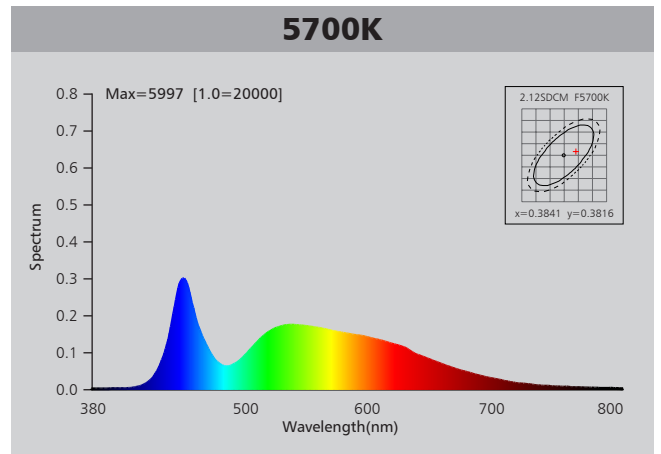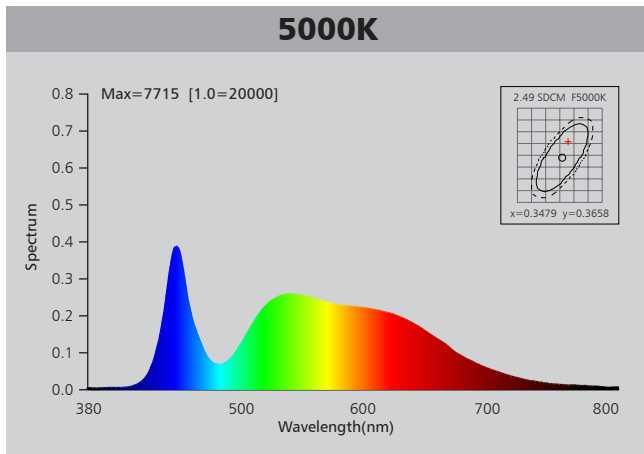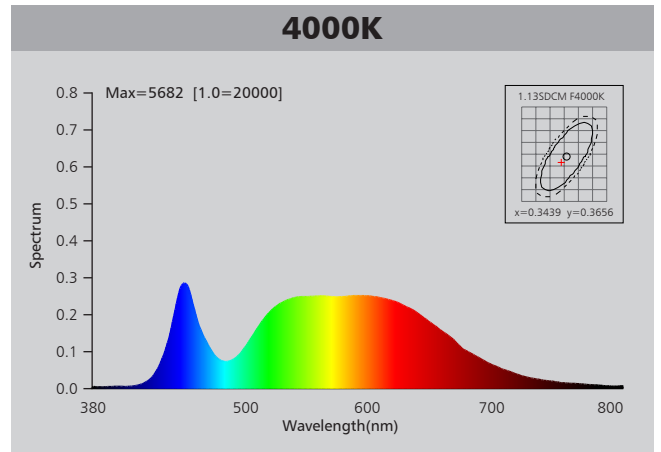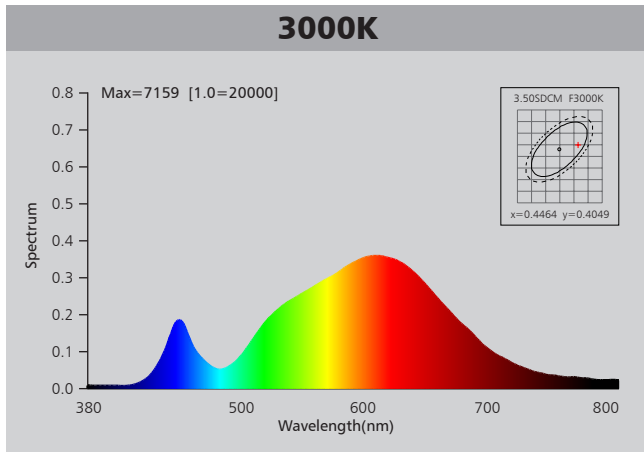



Photometric Diagram

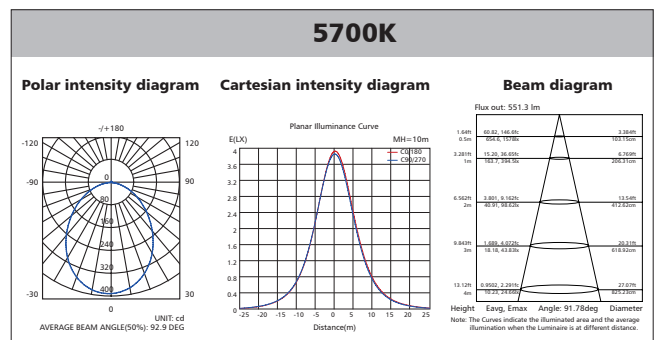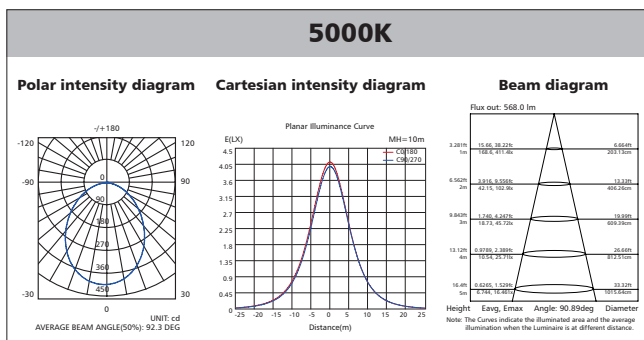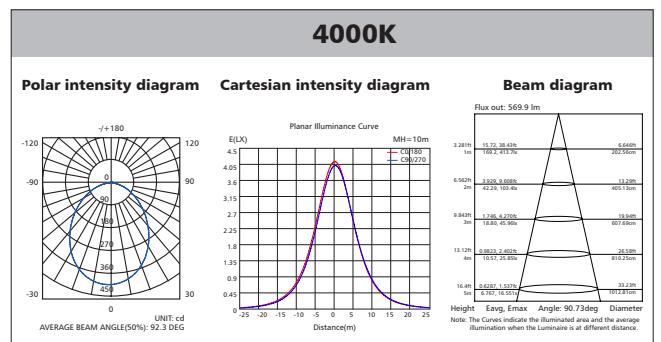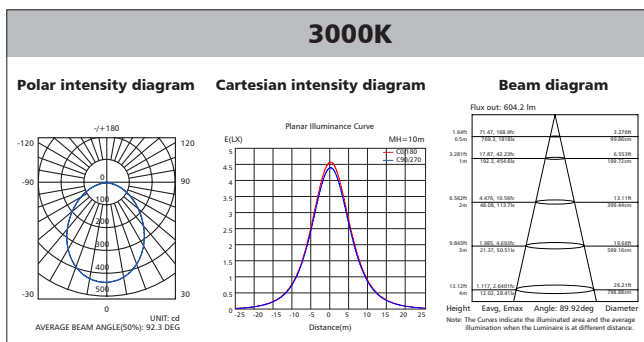

Polar Diagram Comparison

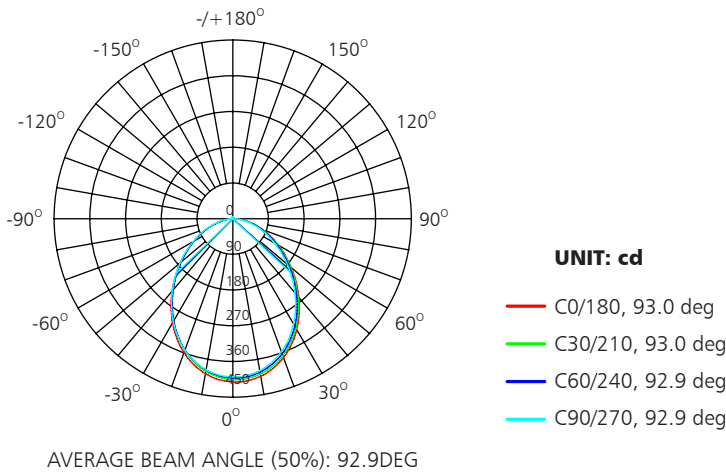


Driver lifetime & LED light decay rate

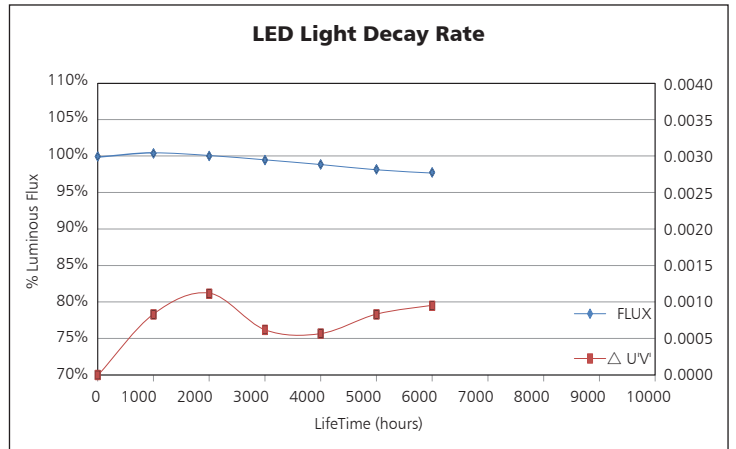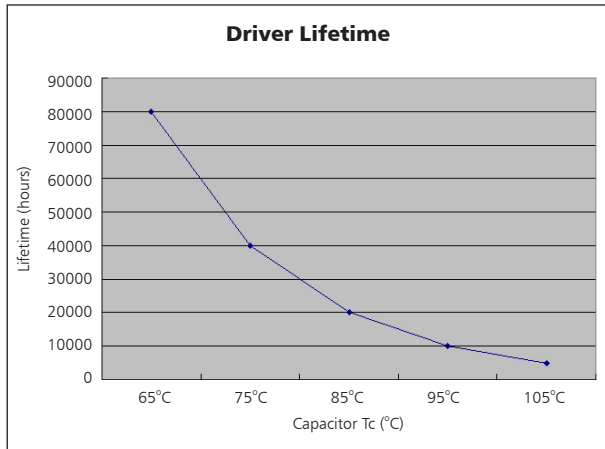


Temperature

- The testing is operated at 25°C
- The lifetime of capacitor, minimum of 5,000 hours if operated at 105°C, will be doubled whenever the temperature drops 10°C
- The highest withstand temperature of IC, MOS could be 120°C
- The highest withstand temperature of LED junction temperature is 150°C

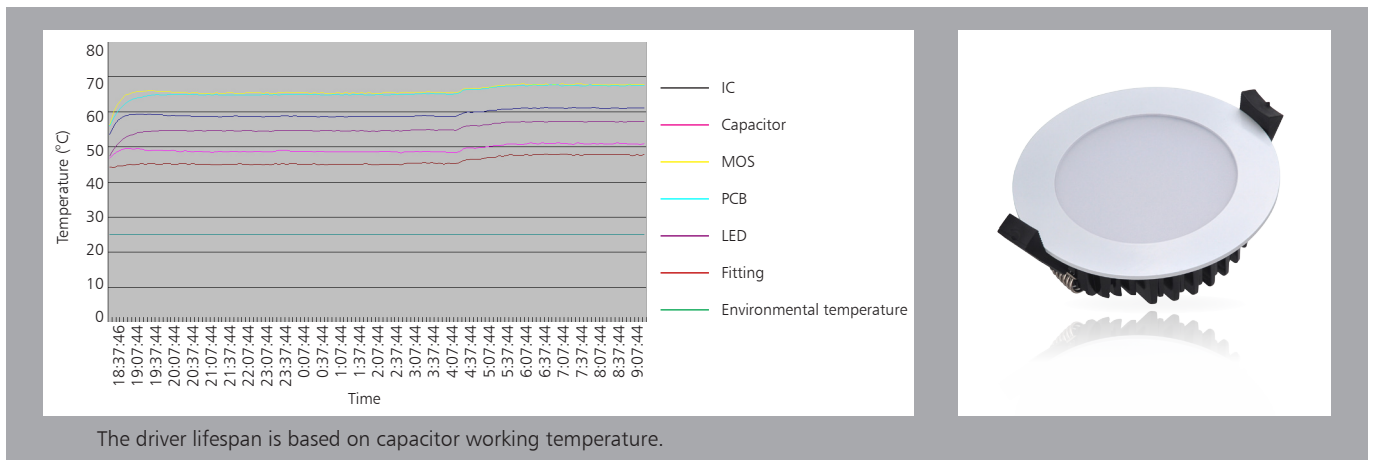

Installation

Install requirements	
A-gap above the fitting	25mm
B-gap to the building material	25mm
C-gap to the thermal insulation	25mm

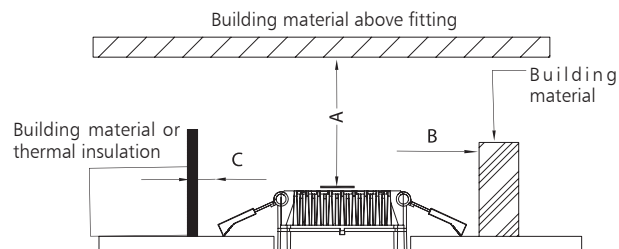

<p>Ceiling Opening $\varnothing 90-95\text{mm}$</p> <p style="text-align: right;">1</p>	<p>Connect Power supply</p> <p style="text-align: right;">2</p>
<p>A. Hold back spring clips</p> <p>B. Push downlight into position</p> <p style="text-align: right;">3</p>	<p>Spring Clips</p> <p>Finish</p> <p style="text-align: right;">4</p>

Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	48.5*37.5*20	0.38	9.5	24

	CTNS	Q'TY(PCS)	VOLUME(CBM)
20" standard container	745	17880	28
40" standard container	1490	35760	56

