



UPSHINE®



Technical Application Guide for UP-SHINE LED Downlight

UP-DL41-3-10W

Introduction



Up-shine SMD LED Down light adopts high lumen SMD LED, PC diffuser with even light output. Plastic coated aluminum housing with internal driver design; it is our most economical and practical downlight version. Dimmable driver shares great popularity by the excellent dimming effect.

- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Dimmable when using triac dimmer
- 90° wide beam angle
- 90-95mm cutout
- CCT: 3000K 4000K
5000K 5700K
- No UV/IR light
- Environment friendly, without Mercury or any other hazardous substances

Application notes

- IP54 only for the LED cover, IP40 for other part
- Professional electrician for installation only
- Switch off before installation
- Do not touch when in use
- Keep away from hot steam and corrosive gas


Application Areas

It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

Certificate

CE RoHS SAA

Product Information

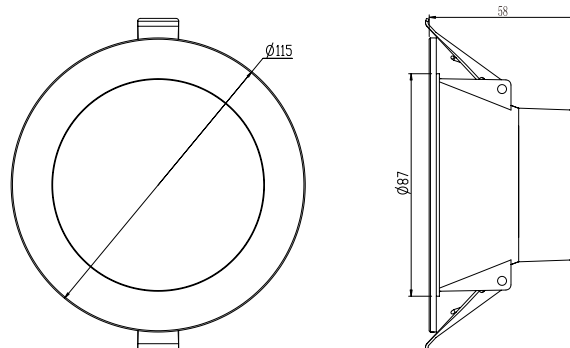

Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam angle	CCT	Lifespan	CRI	Dimmable	Dimension
UP-DL41-3-10W	AC100-240V	10W	0.9	800	90°	3000K	40000h	≥80	No	Ø115*58mm cutout 90-95mm
UP-DL41-3-10W	AC100-240V	10W	0.9	870	90°	4000K	40000h	≥80	No	Ø115*58mm cutout 90-95mm
UP-DL41-3-10W	AC100-240V	10W	0.9	870	90°	5000K	40000h	≥80	No	Ø115*58mm cutout 90-95mm
UP-DL41-3-10W	AC100-240V	10W	0.9	820	90°	5700K	40000h	≥80	No	Ø115*58mm cutout 90-95mm
UP-DL41-3-10W-D	AC230V	10W	0.9	800	90°	3000K	40000h	≥80	Yes	Ø115*58mm cutout 90-95mm
UP-DL41-3-10W-D	AC230V	10W	0.9	880	90°	4000K	40000h	≥80	Yes	Ø115*58mm cutout 90-95mm
UP-DL41-3-10W-D	AC230V	10W	0.9	880	90°	5000K	40000h	≥80	Yes	Ø115*58mm cutout 90-95mm
UP-DL41-3-10W-D	AC230V	10W	0.9	830	90°	5700K	40000h	≥80	Yes	Ø115*58mm cutout 90-95mm





Driver data Sheet

Driver data	DIM	Non-DIM
Input rated Voltage	AC230V	AC100-240V
Frequency	50Hz	50/60Hz
Input Voltage	AC200-240V	AC85-265V
Efficiency	≥83%	≥84%
Total load Wattage	10W±1W	10W±1W
Power Factor	0.9	0.9
Rated input current	≤0.06A	≤0.12A
Full load output Voltage	35-38V	35-38V
Rated output current	225mA	230mA
Output current range	225mA±5%	230mA±5%
Power tolerance	±5%	±5%
Current output tolerance	±5%	±5%
Dimming range	10%-100%	—
Dimmer	Triac dimmers	—
Withstand voltage	AC3750V	AC3750V
Short circuit protection	PASS	PASS
Over voltage protection	PASS	PASS
Over temperature protection	PASS	PASS





Fixture Compatibility

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
10W	II	IP40 / IP54	-20°C~45°C	0~90%	-20°C~65°C


Spectral Distribution

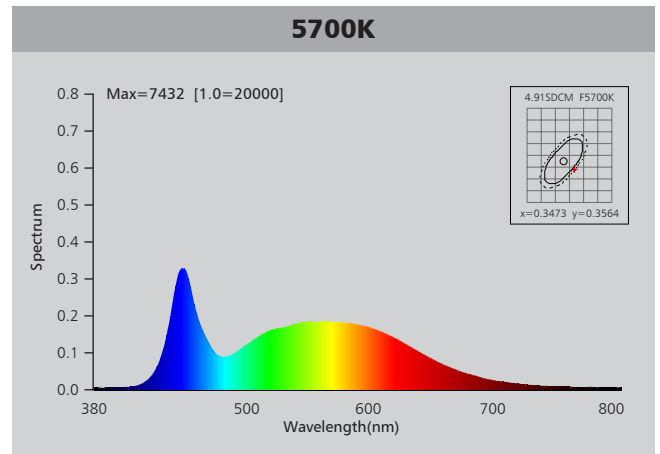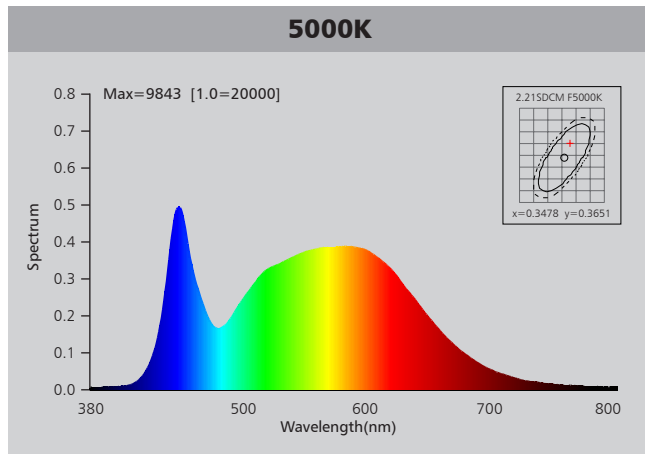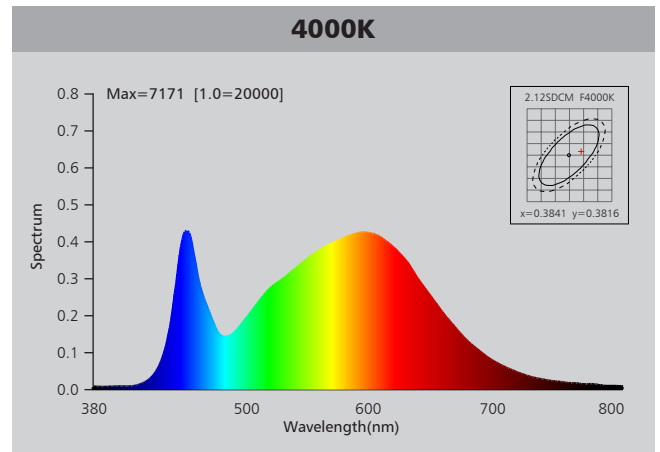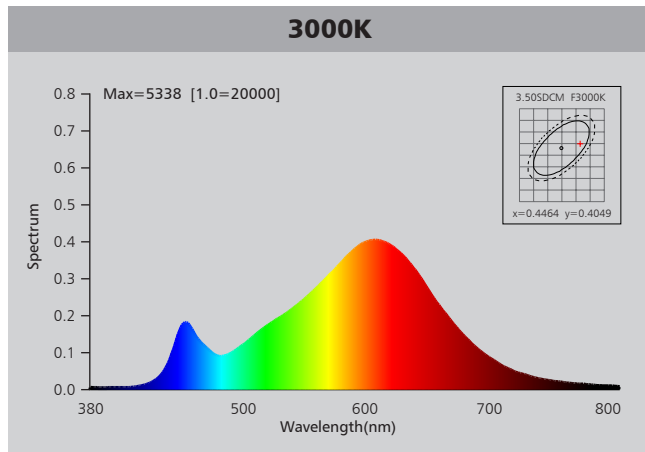



Photometric Diagram

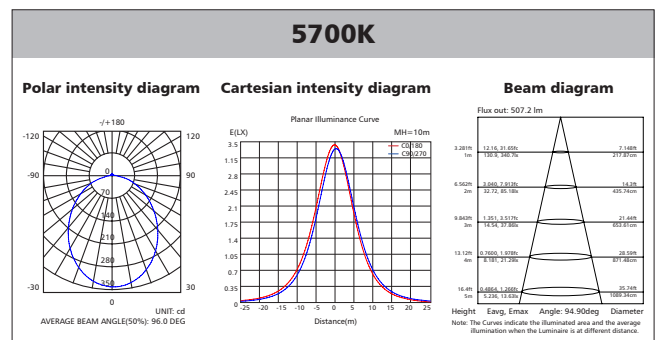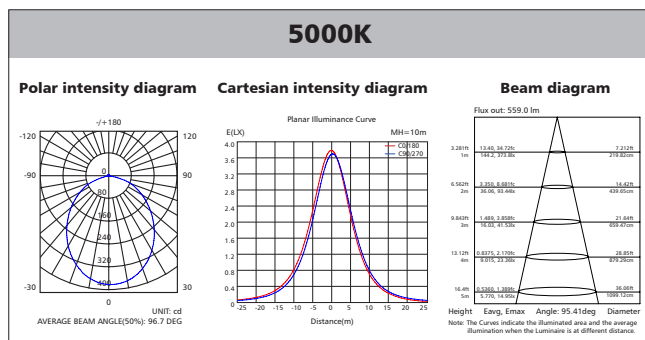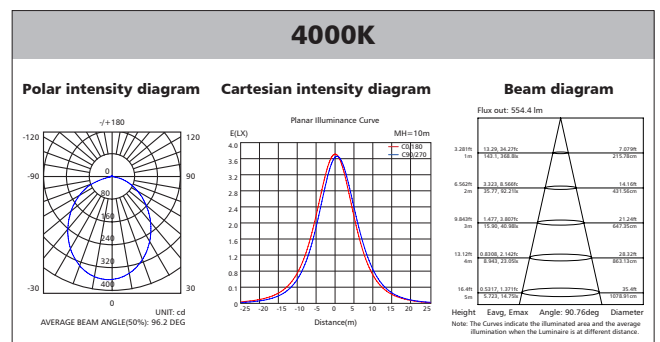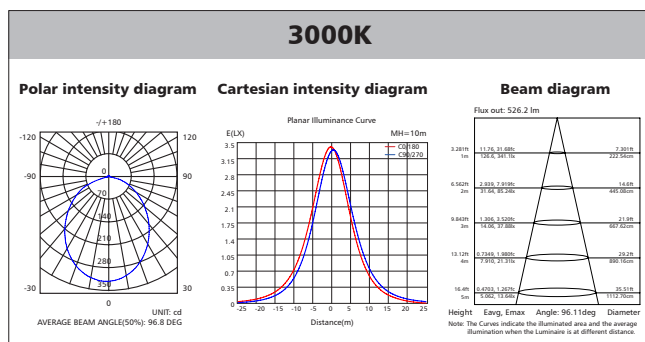

Polar Diagram Comparison

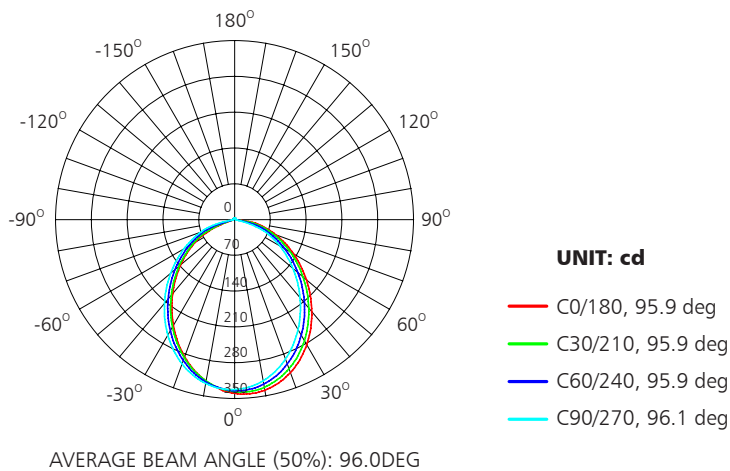


Driver lifetime & LED light decay rate

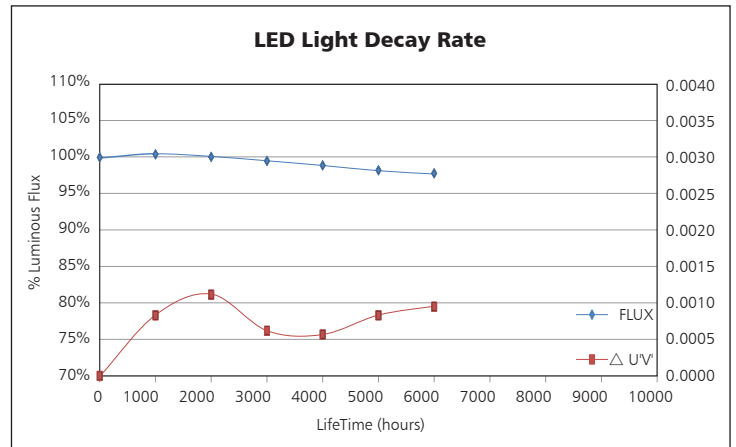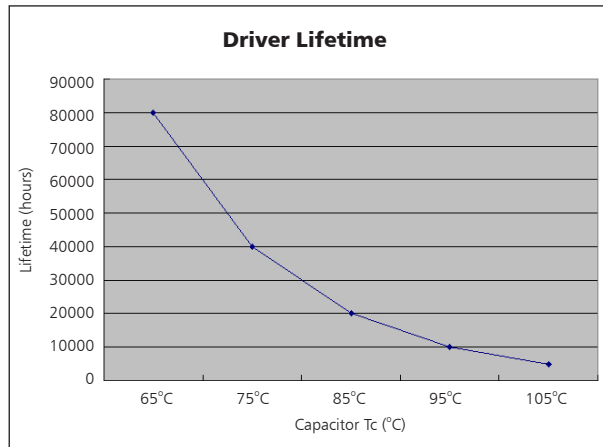

Temperature


- The testing is operated at 25°C
- The lifetime of capacitor, minimum of 5,000 hours if operated at 105°C, will be doubled whenever the temperature drops 10°C
- The highest withstand temperature of IC, MOS could be 120°C
- The highest withstand temperature of LED junction temperature is 150°C

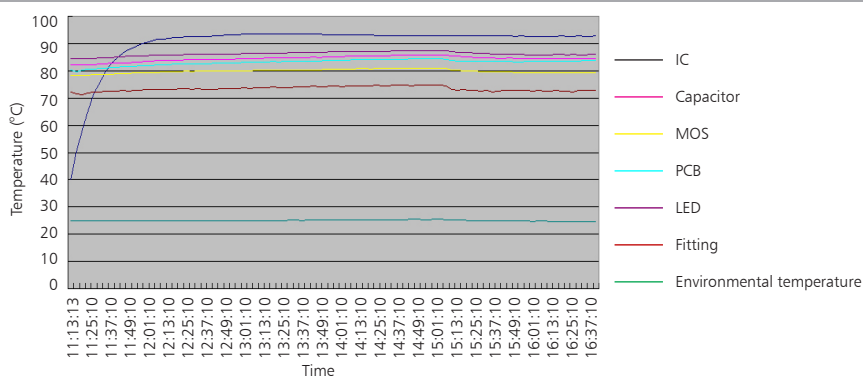

The driver lifespan is based on capacitor working temperature.

Installation

Install requirements	
A-gap above the fitting	25mm
B-gap to the building material	25mm
C-gap to the thermal insulation	25mm

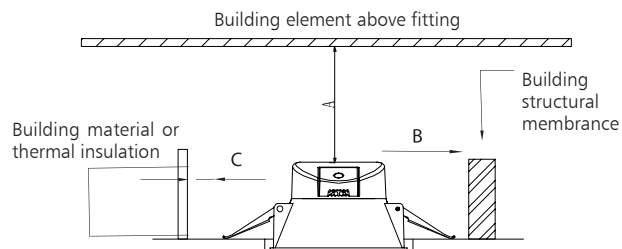

Ceiling Opening 1	Loosen the screw and take off the cover, connect the wire to the wiring terminals, put the cover back and tighten the screw. 2
A. Hold back spring clips B. Push downlight into position 3	Spring Clips Ceiling 4

Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	39*26.5*37.5	0.2	8.3	30

	CTNS	Q'TY(PCS)	VOLUME(CBM)
20" standard container	704	21120	28
40" standard container	1408	42240	56

