



UPSHINE®



Technical Application
Guide for UP-SHINE
LED Frameless
Panel Light

UP-PL6060-45W-P

Introduction



Frameless panel is an improved version compared to regular panels. They are of high lumen output, high CRI > 80, top branded driver with stable working performance. Dimmable version comes with triac dim, 0-10V dim, DALI dim, it shares great popularity by perfect dimming range and great compatibility with worldwide dimmers. The Frameless structural design makes it special and elegant. 5mm thickness diffuser with extremely even light output provides high quality lighting effect.

- Up to 80% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Dimmable when using triac dimmer
- 120° wide beam angle
- CCT: 3000K 4000K
5000K 5700K
- No UV/IR light
- Environment friendly, without Mercury or any other hazardous substances

Application notes

- IP40 for indoor use
- Professional electrician for installation only
- Switch off before installation
- Do not touch when in use
- Keep away from hot steam and corrosive gas

Application Areas


Widely used for various commercial lighting and residential lighting applications, such as office, shopping mall, hotel, restaurant, hospital, home lighting etc.

Certificates

CE RoHS SAA



Product Information

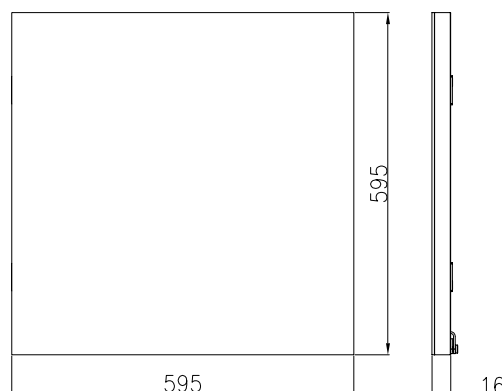

Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam angle	CCT	Lifespan	CRI	Dimmable	Dimension
UP-PL6060-45W-P	AC100-240V	45W	≥0.9	3700	120°	3000K	40000h	≥80	No	595*595*16mm
UP-PL6060-45W-P	AC100-240V	45W	≥0.9	3800	120°	4000K	40000h	≥80	No	595*595*16mm
UP-PL6060-45W-P	AC100-240V	45W	≥0.9	3850	120°	5000K	40000h	≥80	No	595*595*16mm
UP-PL6060-45W-P	AC100-240V	45W	≥0.9	3950	120°	5700K	40000h	≥80	No	595*595*16mm
UP-PL6060-45W-P-D	AC230V	45W	≥0.9	3550	120°	3000K	40000h	≥80	Yes	595*595*16mm
UP-PL6060-45W-P-D	AC230V	45W	≥0.9	3600	120°	4000K	40000h	≥80	Yes	595*595*16mm
UP-PL6060-45W-P-D	AC230V	45W	≥0.9	3680	120°	5000K	40000h	≥80	Yes	595*595*16mm
UP-PL6060-45W-P-D	AC230V	45W	≥0.9	3750	120°	5700K	40000h	≥80	Yes	595*595*16mm





Driver data Sheet

Driver data	DIM	Non-dim
Input rated Voltage	AC230V	AC100-240V
Frequency	50Hz	50/60Hz
Input Voltage	AC200-240V	AC85-265V
Efficiency	≥83%	≥86%
Total load Wattage	45W±5%	45W±5%
Power Factor	≥0.9	≥0.9
Rated input current	≤0.25A	≤0.5A
Full load output Voltage	DC35-38V	DC35-38V
Rated output current	1000mA	1050mA
Output current range	1000mA±5%	1050mA±5%
Power tolerance	±5%	±5%
Current output tolerance	±5%	±5%
Dimming range	8%-100%	—
Dimmer	Triac dimmers	—
Short circuit protection	PASS	PASS
Over voltage protection	PASS	PASS
Over temperature protection	PASS	PASS
Withstand voltage	AC3750V	AC3750V





Fixture Compatibility

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
45W	II	IP40	-20°C~45°C	0~90%	-20°C~65°C


Spectral Distribution

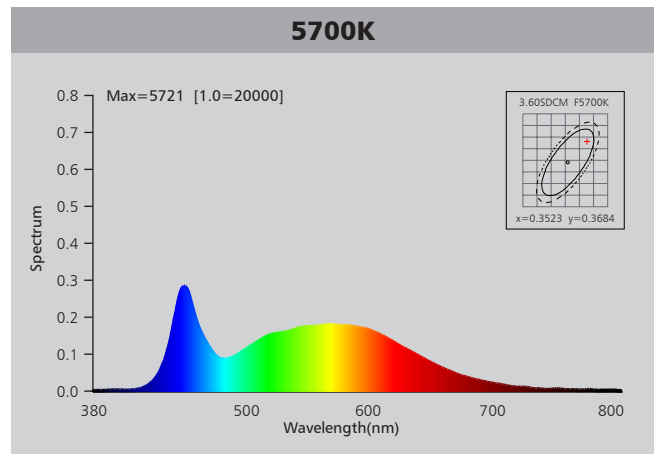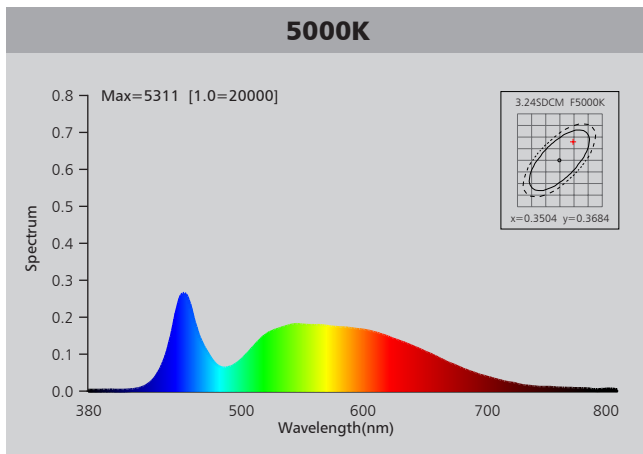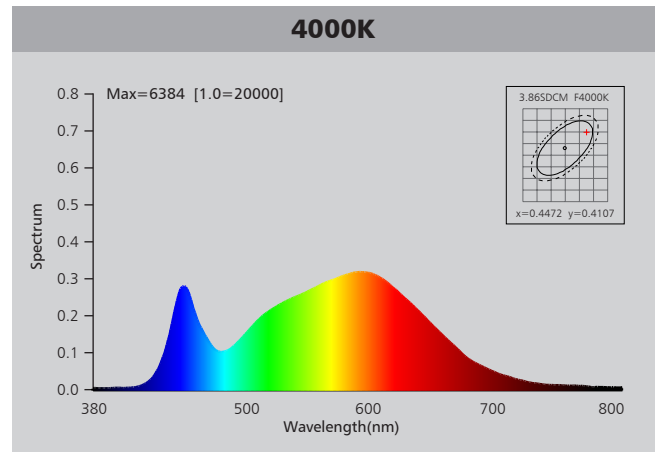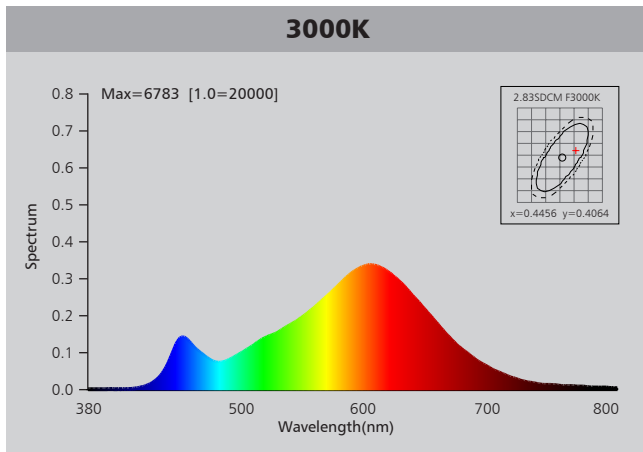

Photometric Diagram

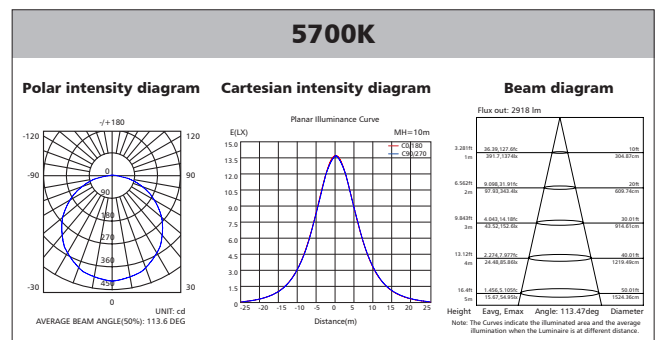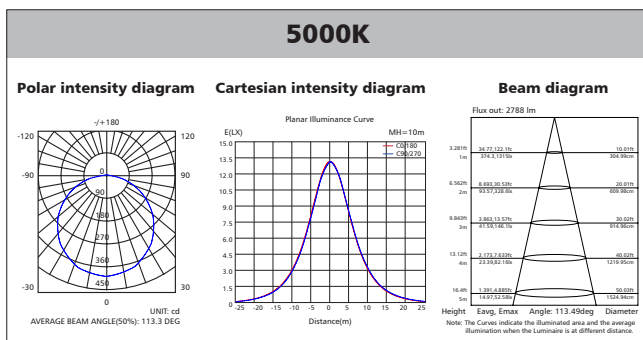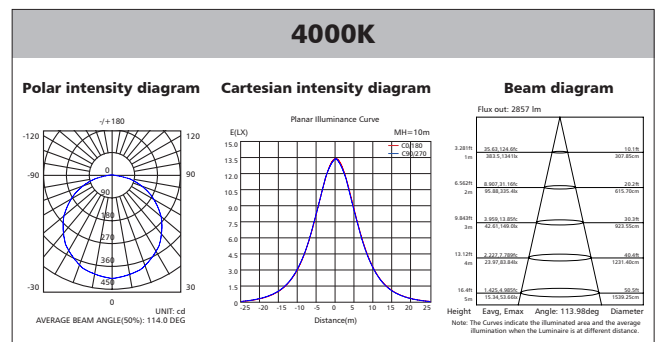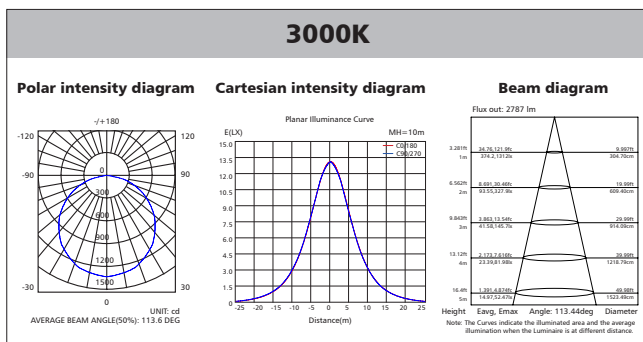



Polar Diagram Comparison

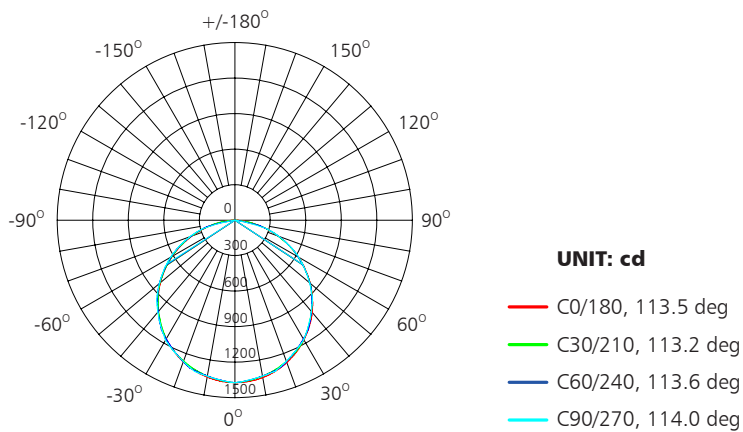

AVERAGE BEAM ANGLE (50%): 113.6DEG




Driver lifetime & LED light decay rate

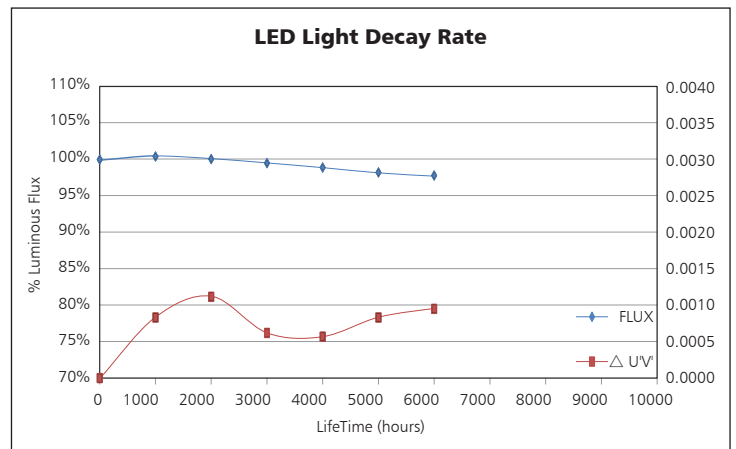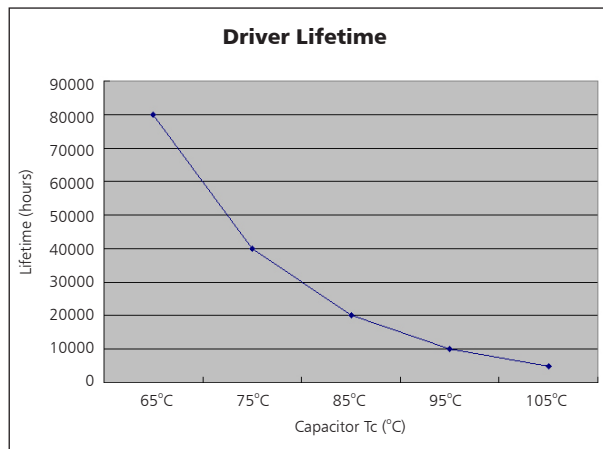

Temperature

- The testing is operated at 25°C
- The lifetime of capacitor, minimum of 5,000 hours if operated at 105°C, will be doubled whenever the temperature drops 10°C
- The highest withstand temperature of IC, MOS could be 120°C
- The highest withstand temperature of LED junction temperature is 150°C

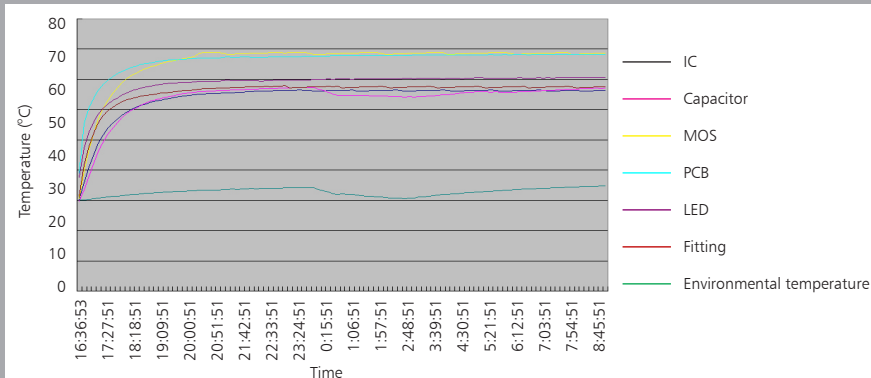


The driver lifespan is based on capacitor working temperature.


Installation

1. Recessed into ceiling


1. Remove ceiling plaster slab.

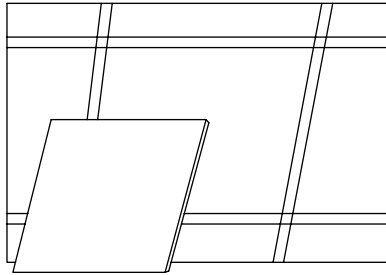


2. Connect power supply.



3. Fix the panel light into right place.

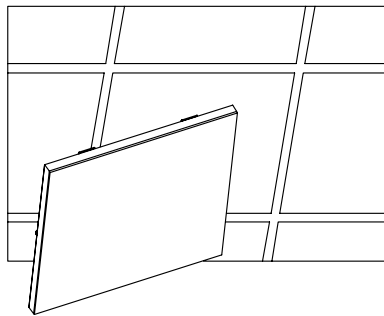


4. Stabilize the panel.

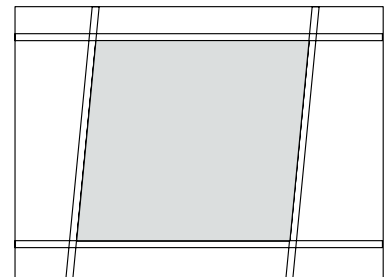


2. Suspending


1. Fastening the bracket on the ceiling with plastic anchor and screw.




2. Put the DC line through the mounting box and connect the power supply.

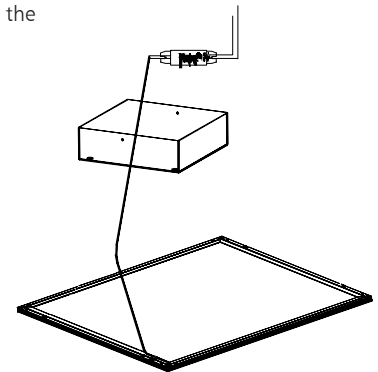


3. Connect one end of steel wire with panel, another end with mounting box.

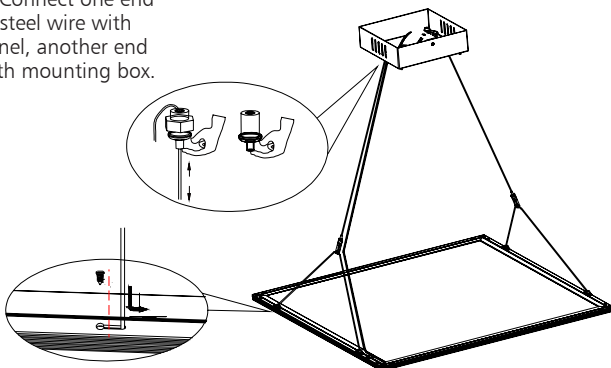

4. Hang the mounting box back to the bracket.

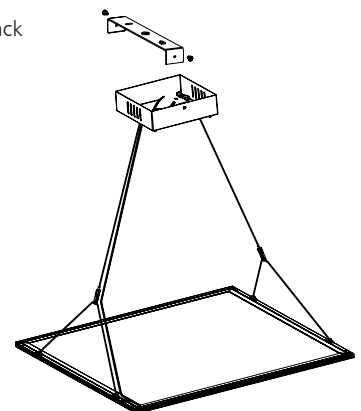

3. Suspending

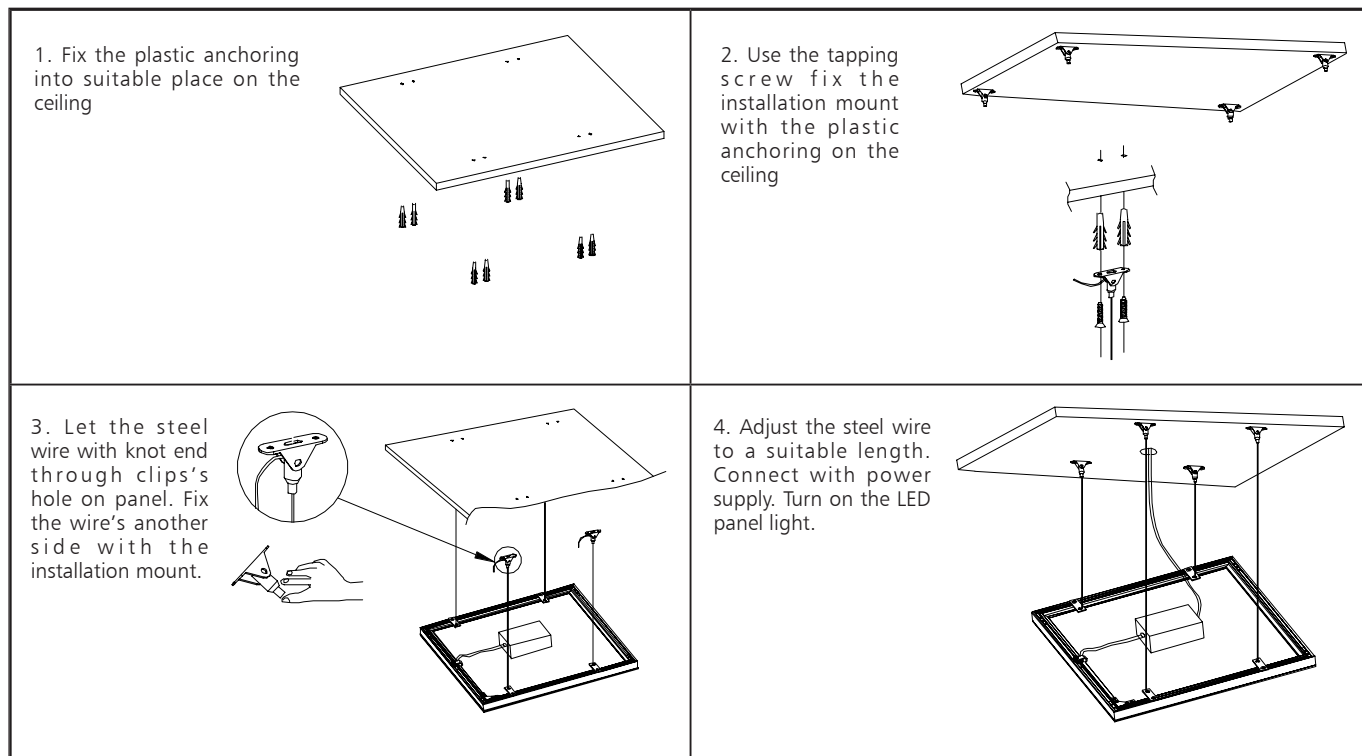

Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	66.5*21*73	5.1	24.5	4

	CTNS	Q'TY(PCS)	VOLUME(CBM)
20" standard container	250	1000	28
40" standard container	500	2000	56

