




# Technical Application Guide for UP-SHINE LED Panel Light

UP-PL2219-15W

# Introduction

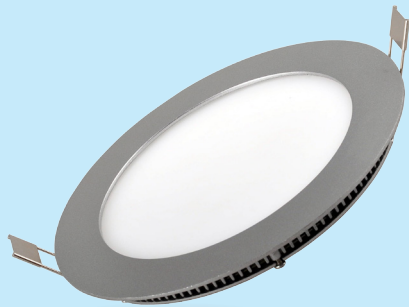

Super Slim round panel provided in full diameter, adopting SMD led chip. External driver comes with triac dim, it shares great popularity by perfect dimming range and great compatibility with worldwide dimmers. The ultra slim profile fits perfectly for all working places.

- Up to 80% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Triac dim
- 120° wide beam angle
- 205mm cutout
- CCT: 3000K 4000K  
5000K 5700K
- No UV/IR light
- Environment friendly, without Mercury or any other hazardous substances

## Application notes

- IP40 for indoor use only
- Professional electrician for installation only
- Switch off before installation
- Do not touch when in use
- Keep away from hot steam and corrosive gas

## Application Areas



Widely used for various commercial lighting and residential lighting applications, such as offices, shopping mall, hotel, restaurant, hospital, home lighting etc.

## Certificates

CE RoHS



# Product Information



## Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam angle	CCT	Lifespan	CRI	Dimmable	Dimension
UP-PL2219-15W	AC230V	15W	≥0.9	1000	120°	3000K	40000h	≥80	No	Ø220*19mm cutout 205mm
UP-PL2219-15W	AC230V	15W	≥0.9	1050	120°	4000K	40000h	≥80	No	Ø220*19mm cutout 205mm
UP-PL2219-15W	AC230V	15W	≥0.9	1100	120°	5000K	40000h	≥80	No	Ø220*19mm cutout 205mm
UP-PL2219-15W	AC230V	15W	≥0.9	1130	120°	5700K	40000h	≥80	No	Ø220*19mm cutout 205mm
UP-PL2219-15W-D	AC230V	15W	≥0.9	900	120°	3000K	40000h	≥80	Yes	Ø220*19mm cutout 205mm
UP-PL2219-15W-D	AC230V	15W	≥0.9	970	120°	4000K	40000h	≥80	Yes	Ø220*19mm cutout 205mm
UP-PL2219-15W-D	AC230V	15W	≥0.9	1000	120°	5000K	40000h	≥80	Yes	Ø220*19mm cutout 205mm
UP-PL2219-15W-D	AC230V	15W	≥0.9	1030	120°	5700K	40000h	≥80	Yes	Ø220*19mm cutout 205mm





## Driver data Sheet

Driver data	DIM	Non-dim
Input rated Voltage	AC230V	AC230V
Frequency	50HZ	50HZ
Input Voltage	AC200-240V	AC200-240V
Efficiency	≥78%	≥82%
Total load Wattage	15W±1W	15W±1W
Power Factor	≥0.9	≥0.9
Rated input current	≤0.08A	≤0.08A
Full load output Voltage	DC33-39V	DC33-39V
Rated output current	330mA	350mA
Output current range	330mA±5%	350mA±5%
Power tolerance	±5%	±5%
Current output tolerance	±5%	±5%
Dimming range	8%-100%	—
Dimmer	Triac dimmers	—
Short circuit protection	PASS	PASS
Over voltage protection	PASS	PASS
Over temperature protection	PASS	PASS
Withstand voltage	AC3750V	AC3750V





## Fixture Compatibility

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
15W	II	IP40	-20°C~45°C	0~90%	-20°C~65°C


# Spectral Distribution

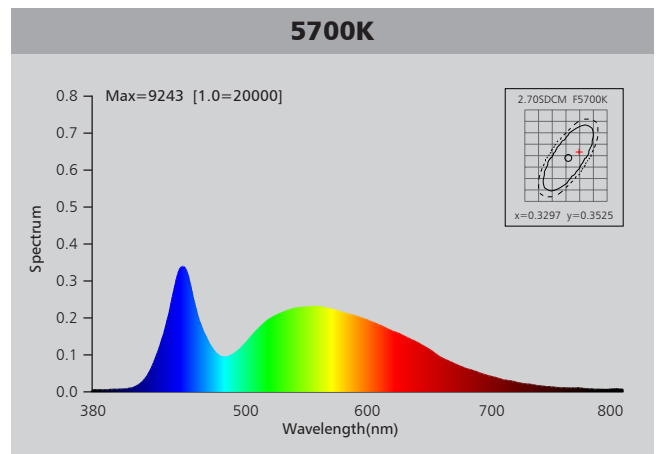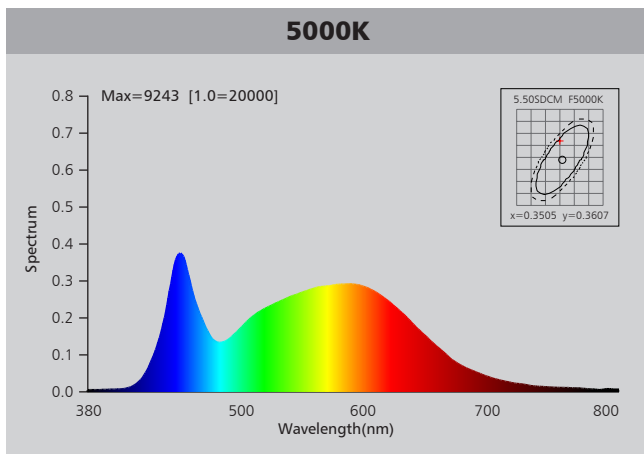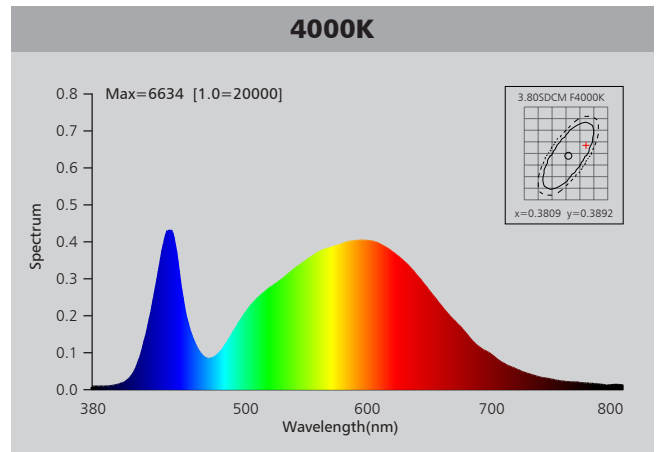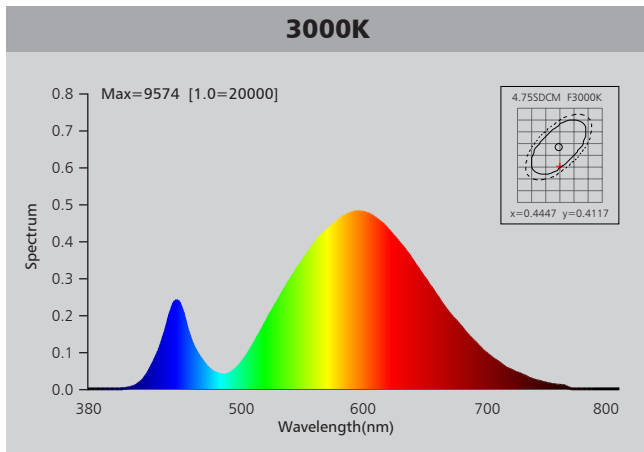

# Photometric Diagram

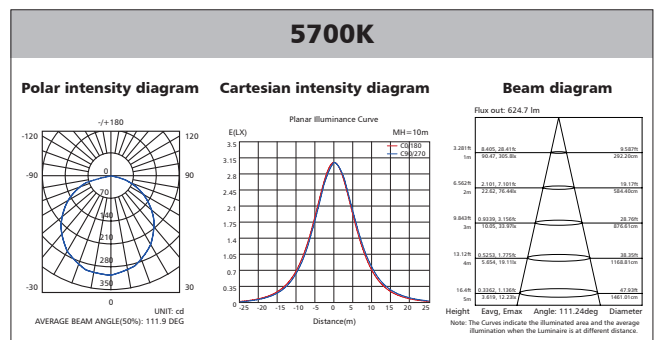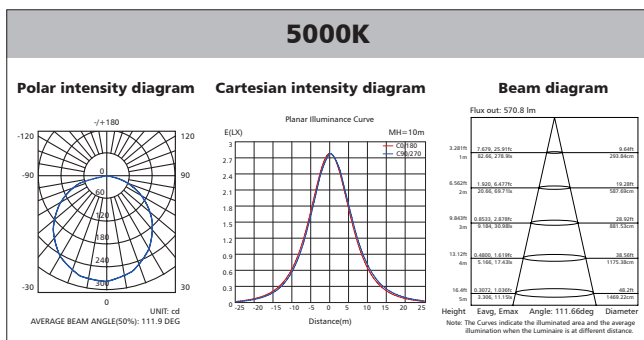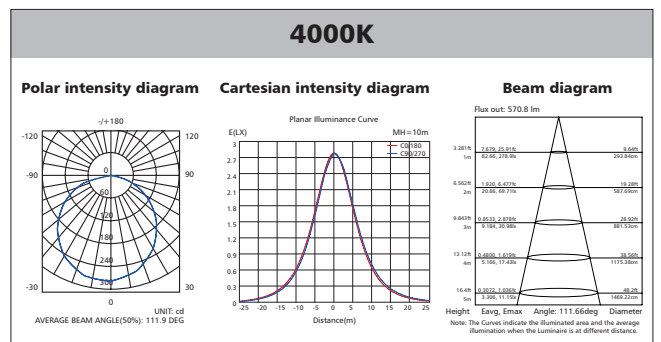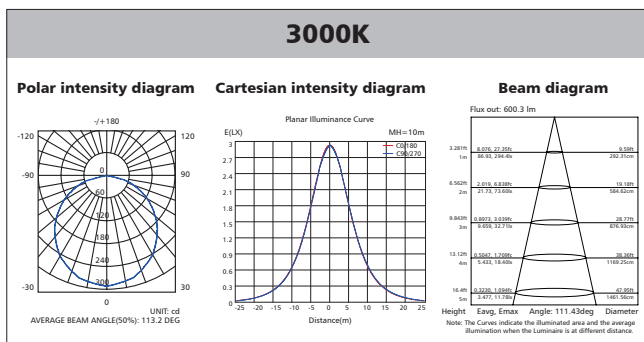

# Polar Diagram Comparison


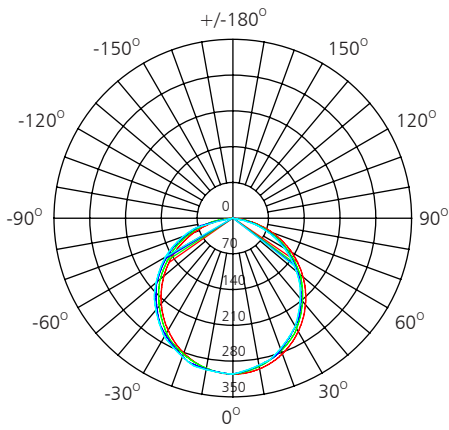


- UNIT: cd**
- C0/180, 111.2 deg
  - C30/210, 111.2 deg
  - C60/240, 111.9 deg
  - C90/270, 112.3 deg

AVERAGE BEAM ANGLE (50%): 111.6DEG




# Driver lifetime & LED light decay rate

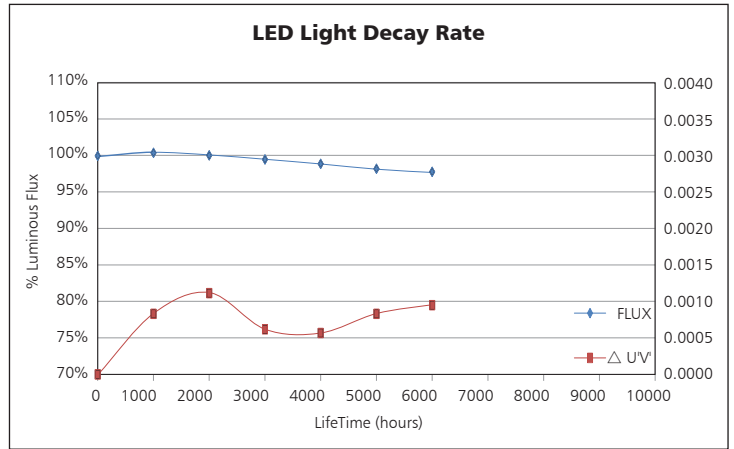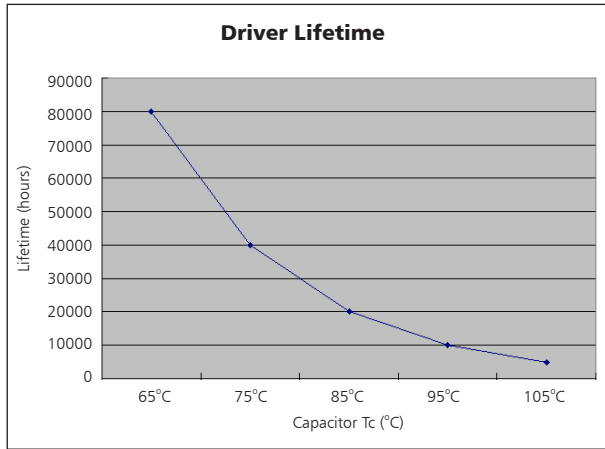

# Temperature


- The testing is operated at 25°C
- The lifetime of capacitor, minimum of 5,000 hours if operated at 105°C, will be doubled whenever the temperature drops 10°C
- The highest withstand temperature of IC, MOS could be 120°C
- The highest withstand temperature of LED junction temperature is 150°C

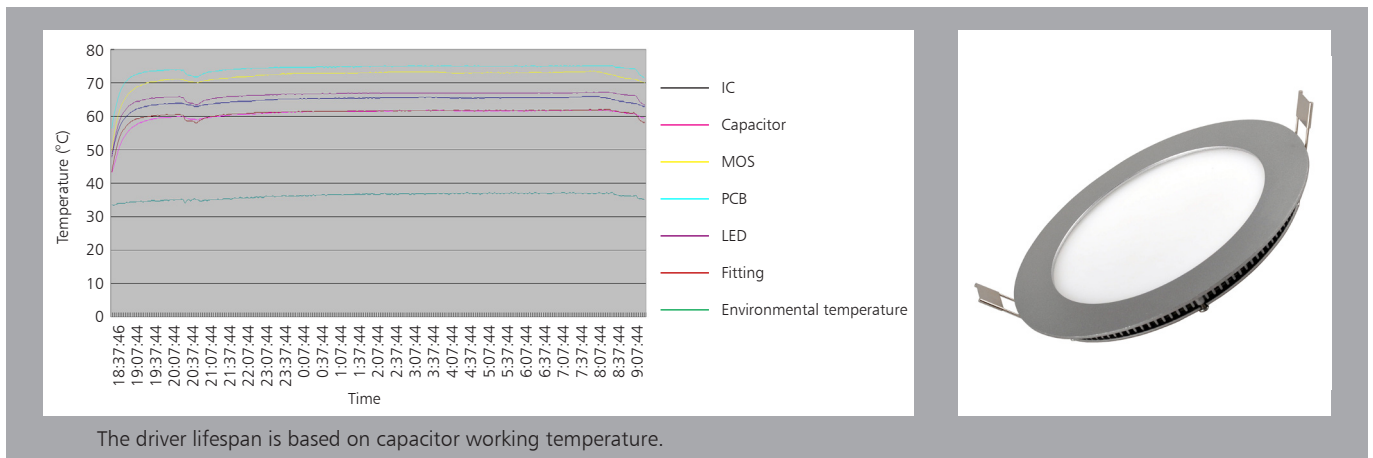

The driver lifespan is based on capacitor working temperature.

# Installation

Install requirements	
A-gap above the fitting	25mm
B-gap to the building material	25mm
C-gap to the thermal insulation	25mm

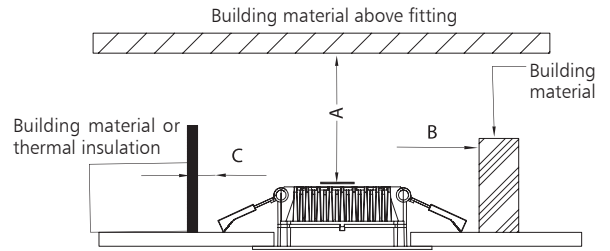

<p><b>Ceiling opening Ø205mm</b></p> <p>1</p>	<p><b>Connect Power supply</b></p> <p>2</p>
<p><b>A. Hold back spring clips</b> <b>B. Push downlight into position</b></p> <p>3</p>	<p><b>Finish</b></p> <p>4</p>

# Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	52.5*33.5*26	0.7	8.5	10

	CTNS	Q'TY(PCS)	VOLUME(CBM)
20" standard container	595	5950	28
40" standard container	1190	11900	56

