



Up-shine[®] Lighting



Technical Application
Guide for UP-SHINE
LED Downlight
UP-DL97-8-25W-B1



Introduction



Up-shine LED downlight with bluetooth wireless control system offers consumers an easy, convenient, and cost-effective way to personalize and control a home lighting system. The control system use bluetooth technology to connect lights throughout an entire home via a free APP on a Bluetooth-enabled smart device. No wires, no router, no remote, and no Wi-Fi signal is needed. A user can simply control downlight from any Bluetooth-enabled phone or tablet and then personalize it to meet any family or lifestyle needs. The system also allows multiple devices to be connected simultaneously so the entire family can stay connected.

- Up to 80% energy saving compared to standard CFL
- Long lifetime of 50,000 hours (25°C)
- 90° wide beam angle
- Ø200-210mm cutout
- Bluetooth
- No UV/IR light
- Environment friendly, without Mercury or any other hazardous substances
- External driver

Application notes

- IP54 for indoor use only
- Professional electrician for installation only
- Switch off before installation
- Do not touch when in use
- Keep away from hot steam and corrosive gas

Application Areas

It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

Certificates





GooglePlay



APP STORE

Bluetooth Intelligent Control

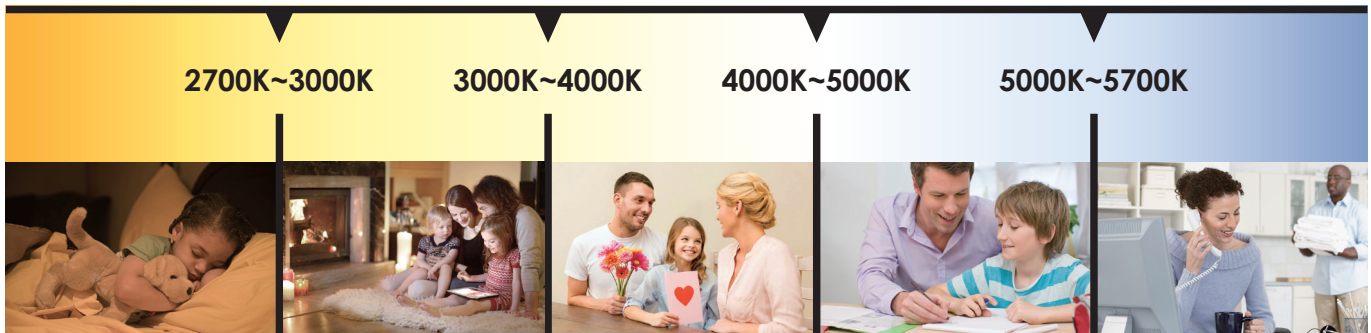



**2700K~5700K
Color Changeable**

Creating fantastic atmosphere by flexible CCT changing between warm white, natural white and day light, the color changing items are controlled by wall touch switch or smart phone APP.






**8%~100%
Dimmable**

Dimmable from 8%~100% brightness with timing and night lamp function, diversified scene setting, creating a humanized smart control system.



Product Information

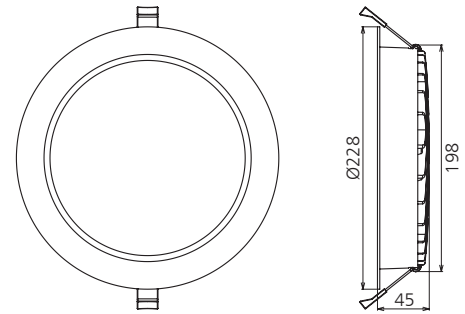

Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam angle	CCT	Lifespan	CRI	Dimmable	Dimension
UP-DL97-8-25W-B1	AC230V	25W	≥0.9	2150 ⋮ 2650 ⋮ 2430	90°	2700K ⋮ 4000K ⋮ 5700K	50000h	≥80	Yes	Ø228*45mm cutout 200-210mm




Driver data Sheet

Driver data	DIM
Input rated Voltage	AC230V
Frequency	50Hz
Input Voltage	AC200-240V
Efficiency	≥85%
Total load Wattage	25W±5%
Power Factor	≥0.9
Rated input current	≤0.14A
Full load output Voltage	DC25-38V
Rated output current	600mA
Output current range	600mA±5%
Power tolerance	±5%
Current output tolerance	±5%
Dimming range	8%-100%
Dimmer	Triac dimmers
Short circuit protection	PASS
Over voltage protection	PASS
Over temperature protection	PASS
THD	≤18%
Withstand voltage	AC3750V




Fixture Compatibility

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
25W	II	IP54	-20°C~45°C	0~90%	-20°C~65°C


Spectral Distribution

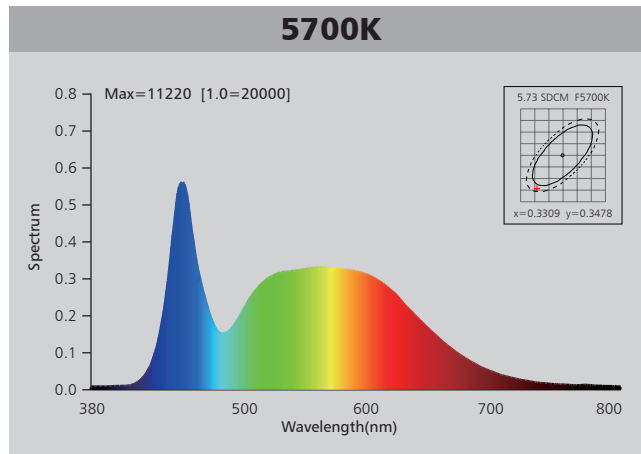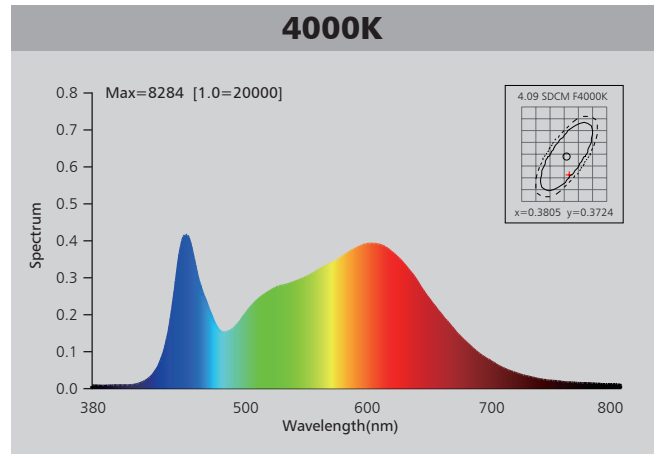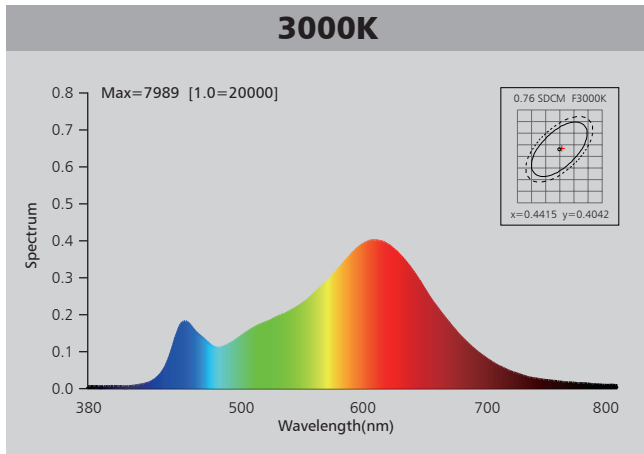

Photometric Diagram

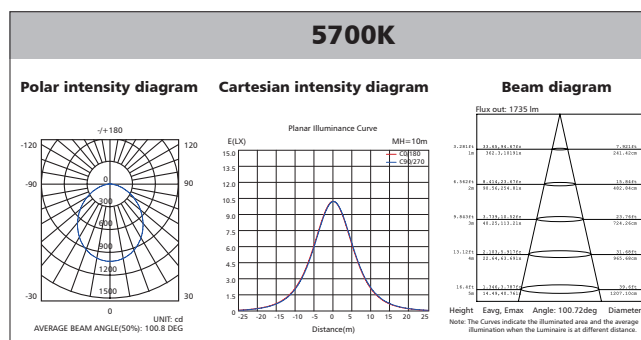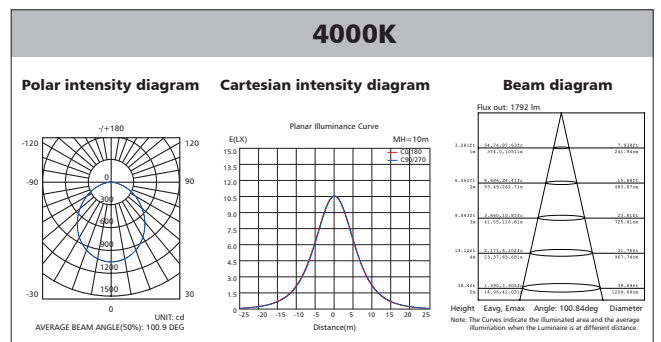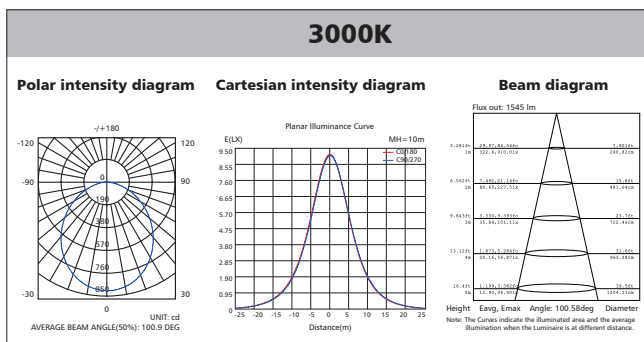

Polar Diagram Comparison

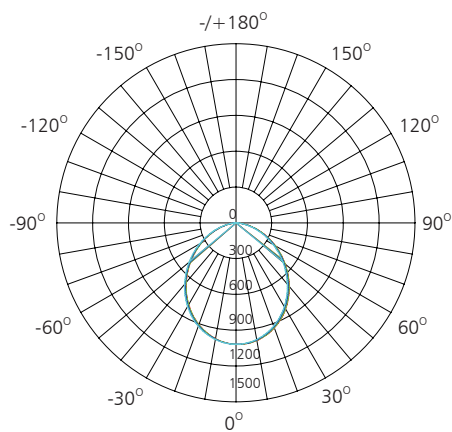



UNIT: cd

- C0/180, 100.8 deg
- C30/210, 100.8 deg
- C60/240, 100.8 deg
- C90/270, 100.8 deg




AVERAGE BEAM ANGLE (50%): 100.8DEG

Driver lifetime & LED light decay rate

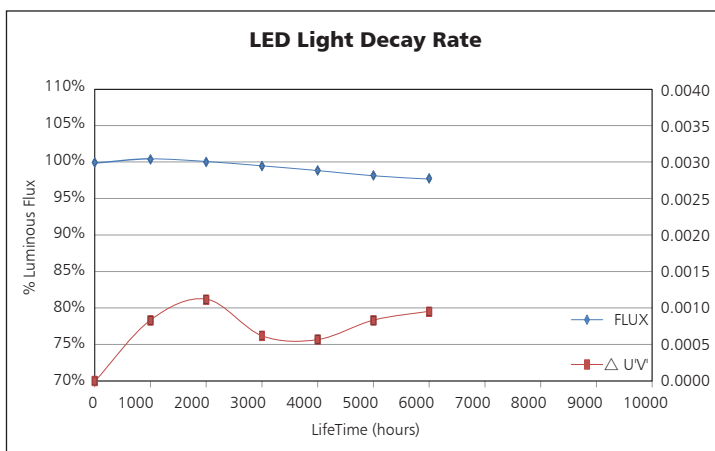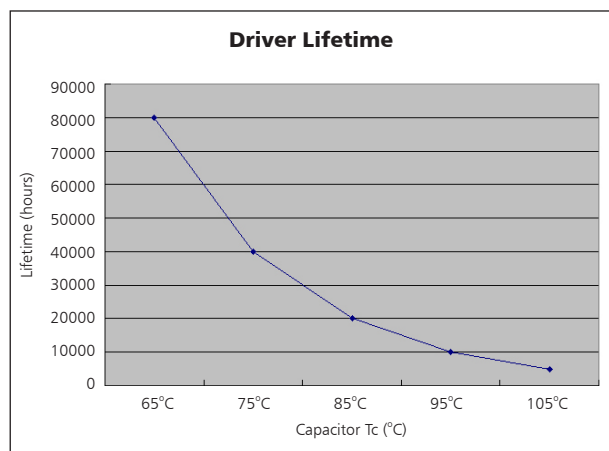


Temperature

- The testing is operated at 25°C
- The lifetime of capacitor, minimum of 5,000 hours if operated at 105°C, will be doubled whenever the temperature drops 10°C
- The highest withstand temperature of IC, MOS could be 120°C
- The highest withstand temperature of LED junction temperature is 150°C

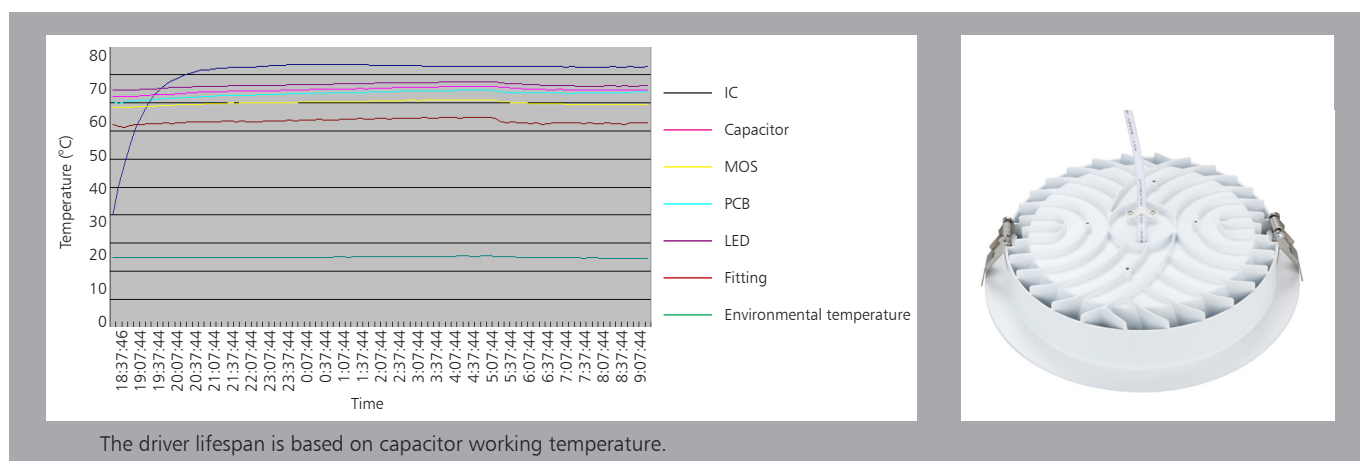

Installation

Install requirements	
A-gap above the fitting	25mm
B-gap to the building material	25mm
C-gap to the thermal insulation	25mm

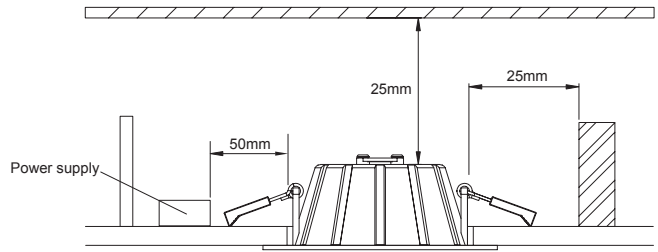

1. Open a hole according to the cutout size of led downlight.

2. Use screw-driver to open the driver terminal cover, feed the main AC wire L. N. in terminal block respectively, then fix the cover back.

3. Connect the downlight with driver, hold back the spring clip then push the downlight into the hole.

4. Make sure the downlight fixed tightly in ceiling, turn on the power (Fig 1).

Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	51.5*27*40.5	0.85	12.5	10

	CTNS	Q'TY(PCS)	VOLUME(CBM)
20" standard container	488	4880	28
40" standard container	976	9760	56

